


FOR INFORMATION ONL Y: DO NOT MANUFACTURE PARTS TO THIS DRAWING

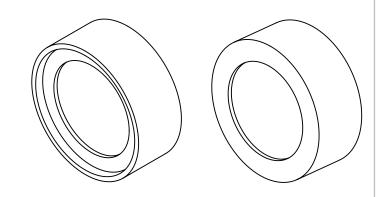



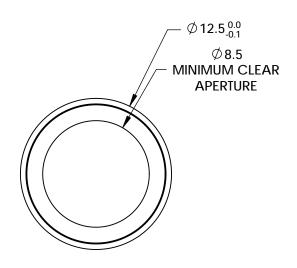

→	- 5.00 _{±0.10}

BANDPASS FILTER

REV. 001	VALUE				
CENTER WAVELENGTH (CWL)	568 ± 2nm				
FULL WIDTH HALF MAX (FWHM)	10 ± 2nm				
MINIMUM TRANSMISSION	≥85%				
BLOCKING	200 - 1200nm				
SURFACE QUALITY	80-50				
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING				
COATING TYPE	HARD COATED				
DURABILITY	MIL-C-48497A, SECT. 3.4.1				
ENVIRONMENTAL	MIL-STD-801F, SECT, 507.4				

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE **DIMENSIONS ARE FOR REFERENCE ONLY**

		Edmund Optics®
HIRD ANGLE	TITLE	OD4, Ø12.5mm, 568nm x 10nm, HC, BP FILTER

THIRD ANGLE - PROJECTION	\$	TITLE	OD4, Ø
ALL DIMS IN	mm	DWG NO	65