
## NOTES:

- 1. SUBSTRATE: OPTICAL SAPPHIRE (AL2O3)
- 2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 WITHIN 3 arcmin.
- 3. BIREFRINGENCE:
  0.008 FOR VISIBLE LIGHT ORTHOGONAL TO OPTICAL AXIS
  AXIS ORIENTATION RANDOM

4. FINE GROUND SURFACE

5. COATING: \$1: NONE \$2: NONE

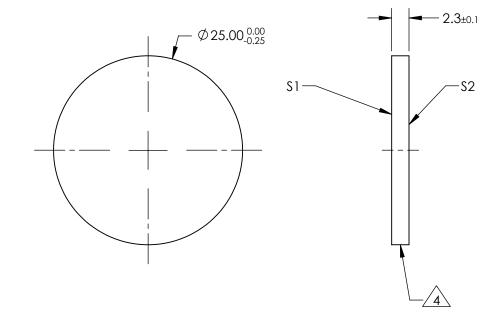

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

SHAPE	\$1 PLANO	S2 PLANO				Edmund Option	S®
SURFACE ACCURACY AT 632.8nm (P-V)	1/4 WAVE	1/4 WAVE				25mm Dig. 1/4) Procision Sannhiro Wind	dow
SURFACE QUALITY	40 - 20	40 - 20			TITLE	25mm Dia. 1/4λ Precision Sapphire Window, Uncoated	
MIN CLEAR APERTURE	≥ Ø 22.5	≥ Ø 22.5					CUEET
BEVEL MAX FACE	0.3mm x 45°	0.3mm x 45°	ALL DIMS IN	mm	DWG NO	88430	SHEET 1 OF 1