
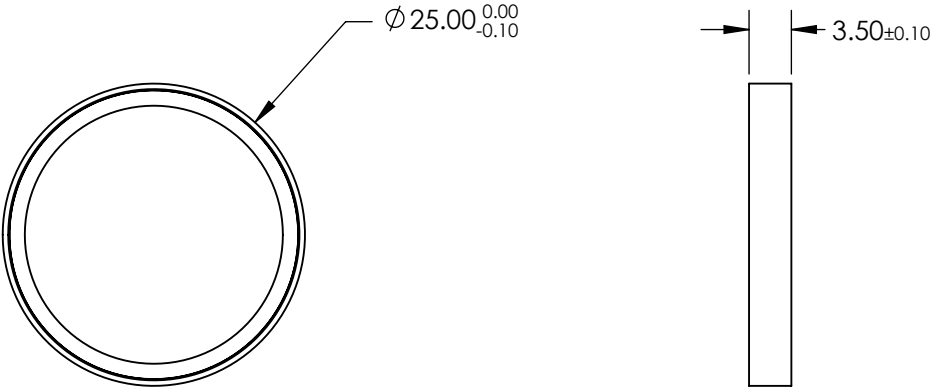




NOTES:

1. SUBSTRATE
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 10 ARCSEC
3. COATING (APPLY ACROSS CLEAR APERTURE)  
PHYSICAL DURABILITY: MIL-C-48497A  
ENVIRONMENTAL DURABILITY: MIL-STD-810F  
Tavg ≥90% @ 329.2 - 733.1nm
4. FINE GROUND SURFACE
5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY  
ACROSS CLEAR APERTURE
6. TRANSMITTED WAVEFRONT DISTORTION RMS @ <λ/4 @ 633nm
7. RoHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 <b>Edmund Optics®</b>			
SHAPE	PLANO	PLANO				
SURFACE QUALITY	60-40	60-40				
CLEAR APERTURE	>80%	>80%				
REJECTION WAVELENGTH	200 - 325	200 - 325	TITLE    Ø25mm, 328.3nm, RAMAN EDGE FILTER			
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED				
			ALL DIMS IN	mm	DWG NO    86234	SHEET 1 OF 1