


NOTES:

1. SUBSTRATE:
N-BK7
2. COATING (APPLY ACROSS COATING APERTURE)
S1: Aluminum w/ Protective Overcoat
R(AVG)>85% FROM 400-700nm, @ 45° AOI

S2: NONE

 FINE GRIND SURFACE


4. RoHS COMPLIANT

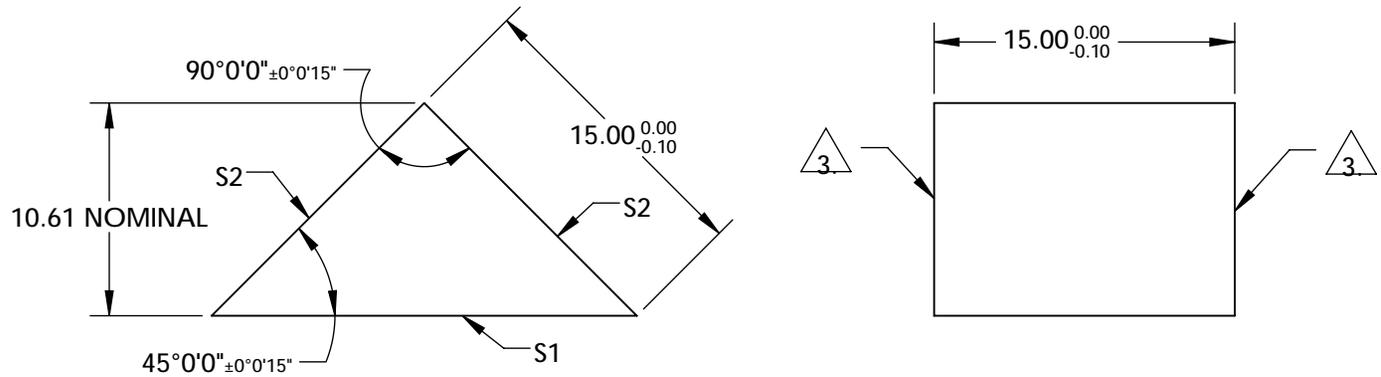

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	19.09 x 13.50	13.50 x 13.50
COATING APERTURE	19.09 x 13.50	13.50 x 13.50
SURFACE FLATNESS	$\lambda/8$	$\lambda/8$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE: 15mm, Aluminum Coated, N-BK7 High Tolerance RA Prism

DWG NO: 32546

SHEET 1 OF 1