NOTES:

1. SUBSTRATE MATERIAL: N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2: MgF2


R(avg) ≤1.75% @ 400 - 700nm



FINE GROUND SURFACE

- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. Rohs Compliant

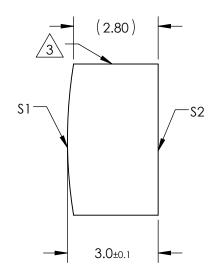

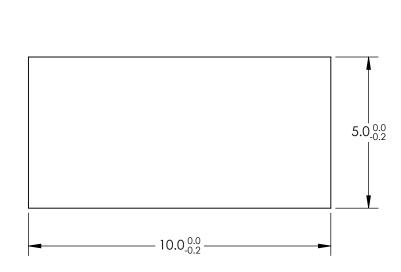

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	30		Redmund Onti	ioo®
RADIUS	15.5	∞	BFL	28.02	Edmund Optics ®		
SURFACE QUALITY	60-40	60-40				5mm H X 10mm L X 30mm FL MgF2 (CATED
CLEAR APERTURE	4.00 X 9.00	4.00 X 9.00	THIRD ANGLE PROJECTION		TITLE	CYLINDER LENS	
COATING APERTURE	4.00 X 9.00	4.00 X 9.00		1		OTEN (DEIX EET)	CLIEFT
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	47765	SHEET 1 OF 1