

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR

R(abs) $\leq 0.25\%$ @ 880nm



R(avg) $\leq 1.25\%$ @ 400 - 870nm

R(avg) $\leq 1.25\%$ @ 890 - 1000nm

3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

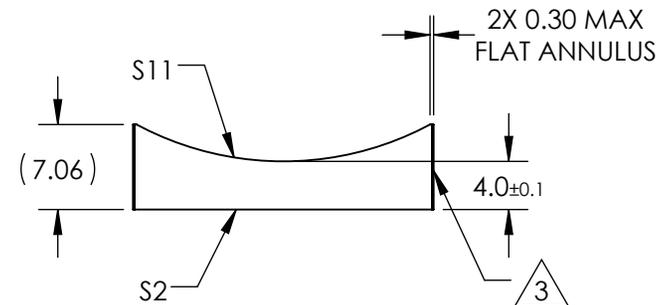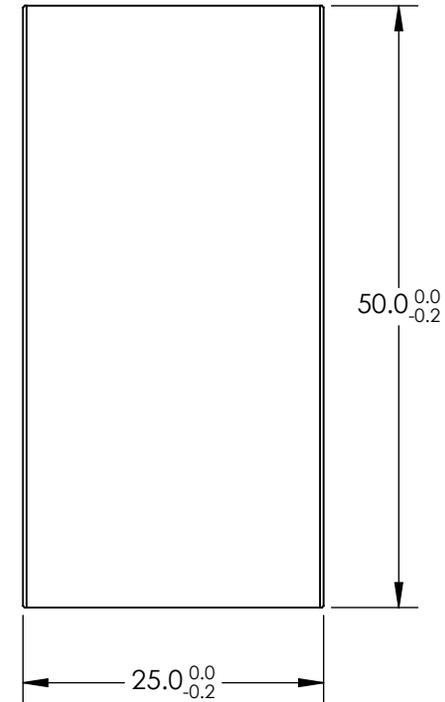

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	-50		Edmund Optics® 25mm H X 50mm L X -50mm FL VIS-NIR COATED, CYLINDER LENS	
SHAPE	CONVEX	PLANO	BFL	-52.6			
RADIUS	25.84	∞	THIRD ANGLE PROJECTION		TITLE		
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO		
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00					SHEET 1 OF 1
COATING APERTURE	24.00 X 49.00	24.00 X 49.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					