NOTES:

1. SUBSTRATE MATERIAL: N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: MgF2


R(avg) ≤1.75% @ 400 - 700nm




FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE

5. Rohs Compliant

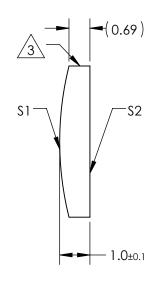

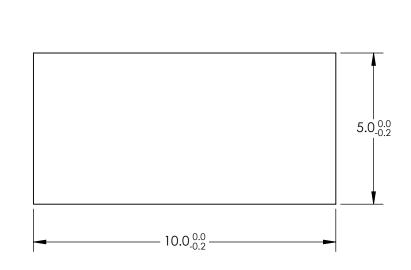

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	20		Edmund Ontion	®
RADIUS	10.32	∞	BFL	19.34		Edmund Optics	
SURFACE QUALITY	60-40	60-40				5mm H X 10mm L X 20mm FL MgF2 COATED	
CLEAR APERTURE	9.00 X 4.00	9.00 X 4.00	THIRD ANGLE PROJECTION		TITLE	CYLINDER LENS	υ,
COATING APERTURE	9.00 X 4.00	9.00 X 4.00		1			
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	47764 SHE	OF 1