

NOTES:



- 1. SUBSTRATE MATERIAL:
N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS 0°



R(avg) ≤0.4% @ 425 - 675nm

- 3. FINE GROUND SURFACE
- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICAIONS APPLY ACROSS CLEAR APERTURE
- 5. RoHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

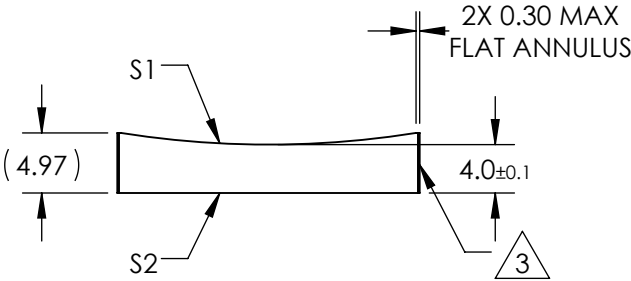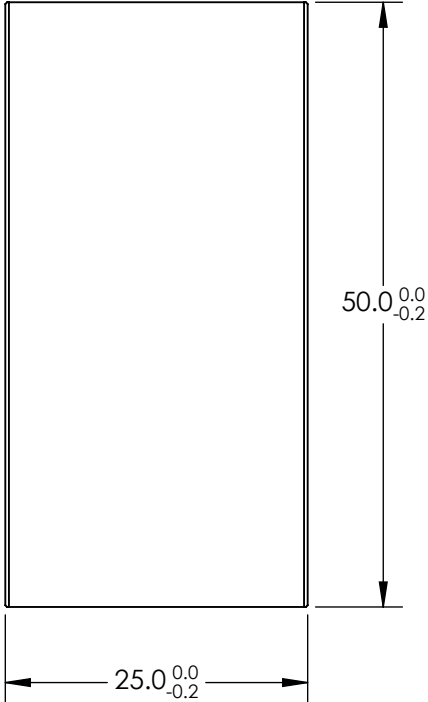

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	 Edmund Optics®					
SHAPE	CONVEX	PLANO						
RADIUS	77.52	∞	EFL	-150	BFL	-152.64		
SURFACE QUALITY	60-40	60-40						
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00	THIRD ANGLE PROJECTION		TITLE	25mm H X 50mm L X -150mm FL VIS 0° COATED, CYLINDER LENS		
COATING APERTURE	24.00 X 49.00	24.00 X 49.00						
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	69810	SHEET 1 OF 1	