
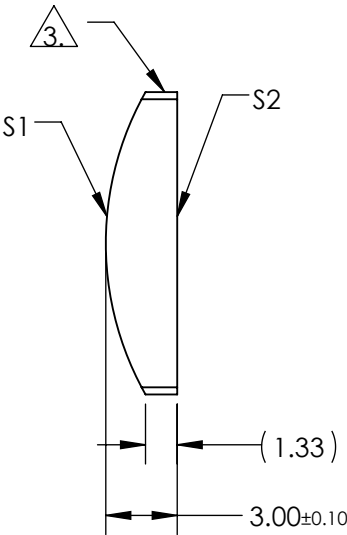




NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)
- S1 & S2: NIR I (600-1050nm)
R(AVG) ≤0.5% @ 600 - 1050nm
3. FINE GROUND SURFACE
4. RoHS COMPLIANT

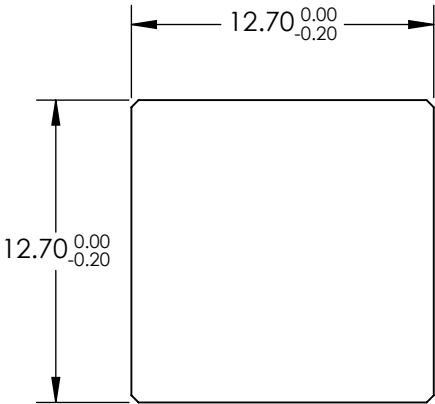

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | | | | | | | |
|-----------------|----------------------|----------------------|---|-------|---|---|-----------------|
| | S1 | S2 | EFL | 25 |  Edmund Optics® | | |
| SHAPE | CONVEX | PLANO | BFL | 23.02 | | | |
| RADIUS | 12.92 | INFINITY |  | | TITLE | 12.7mm H X 12.7mm L X 25mm FL NIR I, CYLINDER LENS | |
| SURFACE QUALITY | 60-40 | 60-40 | | | | | |
| CLEAR APERTURE | 11.43 x 11.43 | 11.43 x 11.43 | ALL DIMS IN | | DWG NO | 36228 | SHEET 1 OF 1 |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | | | | | |