

NOTES:


- 1. SUBSTRATE MATERIAL: FLOAT GLASS
- 2. COATING (APPLOW ACROSS CLEAR APERTURE): \$1: BARE ALUMINUM \$2: NONE
- 3. BLAZE ANGLE: 17° 27' NOMINAL BLAZE WAVELENGTH: 1000nm EFFICIENCY: 60-80% @ BLAZE WAVELENGTH



5. Rohs Compliant



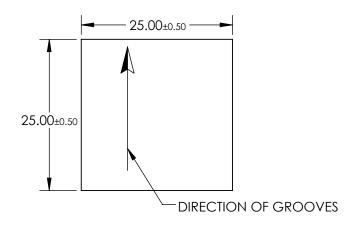



FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

GU	Edmund	Optics ®
	Edmund	Ontion

			┙	1 .	i '	GRATING DIFF 600GR 1000nm 25 x 25	
	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	ON (11110 Bill 000 ON 10001111 20 X 20	
SHAPE	PLANO	PLANO					CUEET
CLEAR APERTURE	22.5 x 22.5	22.5 x 22.5	ALL DIMS IN	mm	DWG NO	43207	SHEET 1 OF 1