
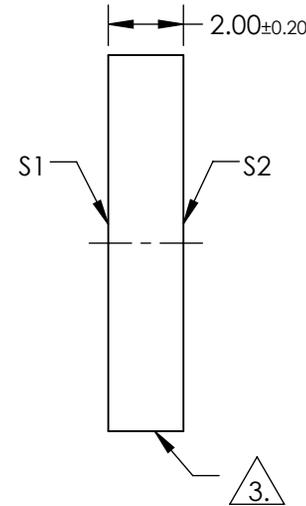


NOTES:

1. SUBSTRATE:
FUSED SILICA
2. COATING (APPLY ACROSS COATING APERTURE):
 S1: R(AVG) ≥ 98% @ 340-488nm @ 0° AOI
 R(AVG) ≥ 98% @ 320-450nm @ 45° AOI FOR ALL POLARIZATION
 R(AVG) ≥ 98% @ 320-450nm @ 45° FOR S-POLARIZATION
 S2: NONE

3. FINE GRIND SURFACE

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

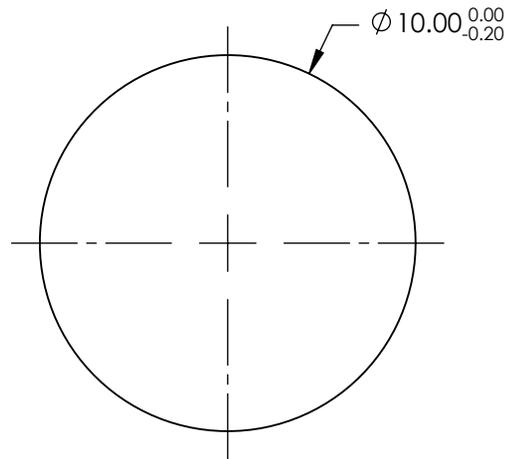

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |
|------------------|----------------------|----------------------|
| SHAPE | PLANO | PLANO |
| CLEAR APERTURE | > 90 | N/A |
| SURFACE QUALITY | 20-10 | COMMERCIAL POLISH |
| SURFACE FLATNESS | λ/10 | N/A |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED |

THIRD ANGLE PROJECTION

ALL DIMS IN

mm

Edmund Optics®

TITLE

Ø10mm, 320 - 450nm BROADBAND λ/10
MIRROR

DWG NO

37559

SHEET
1 OF 1