
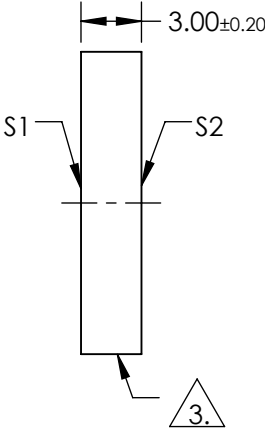


- NOTES:
- 1. SUBSTRATE:  
FUSED SILICA
  - 2. COATING (APPLY ACROSS COATING APERTURE):  
  
S1: R(AVG) ≥ 98% @ 340-488nm @ 0° AOI  
R(AVG) ≥ 98% @ 320-450nm @ 45° AOI FOR ALL POLARIZATION  
R(AVG) ≥ 98% @ 320-450nm @ 45° FOR S-POLARIZATION  
  
S2: NONE



3. FINE GRIND SURFACE

FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING

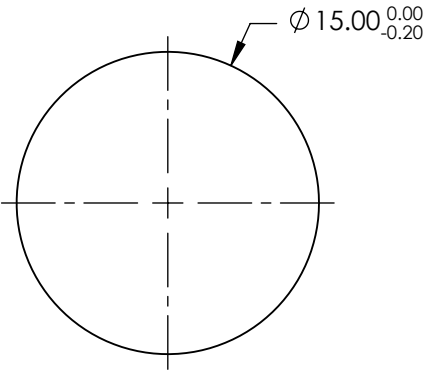

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
CLEAR APERTURE	> 90	N/A
SURFACE QUALITY	20-10	COMMERCIAL POLISH
SURFACE FLATNESS	λ/10 (BEFORE COATING)	N/A
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

 Edmund Optics®			
THIRD ANGLE PROJECTION 		TITLE	Ø15mm, 320 - 450nm BROADBAND λ/10 MIRROR
ALL DIMS IN	mm	DWG NO	37562
			SHEET 1 OF 1