
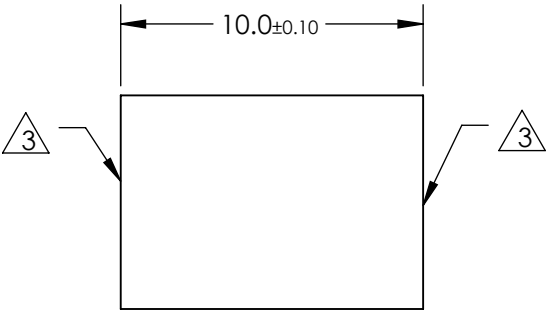


NOTES:

- 1. SUBSTRATE: FUSED SILICA
- 2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: NONE
 - S2: 352nm Laser AR Coating
 - R(ABS) < 0.25% @ 355nm @ 0° AOI
- DAMAGE THRESHOLD
- PULSED: 7.5J/cm² @ 20ns, 20Hz @ 355nm

3 FINE GRIND SURFACE

- 4. ROHS COMPLIANT

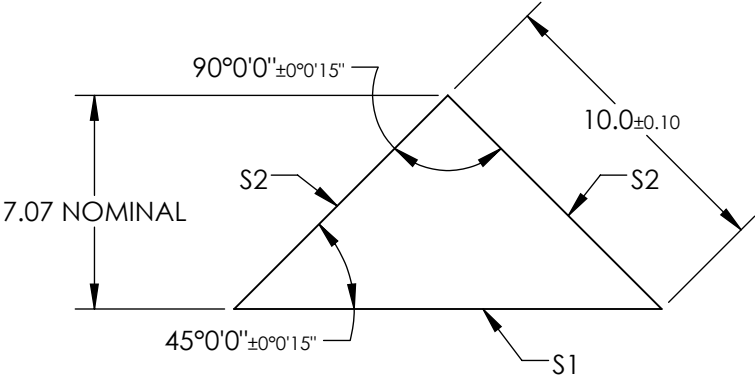

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	11.45 X 9.00	Ø9.00
SURFACE FLATNESS	λ/20	λ/20
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED



ALL DIMS IN mm

			
TITLE	10mm 1/20 WV 355nm AR CTD HT RA FS PRISM		
DWG NO	37623	SHEET 1 OF 1	