
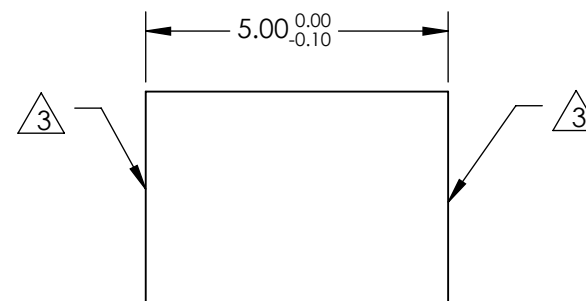


1. SUBSTRATE: FUSED SILICA
2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: NONE
 - S2: 352nm Laser AR Coating
 - R(ABS) < 0.25% @ 355nm @ 0° AOI

DAMAGE THRESHOLD
PULSED: 7.5J/cm² @ 20ns, 20Hz @ 355nm

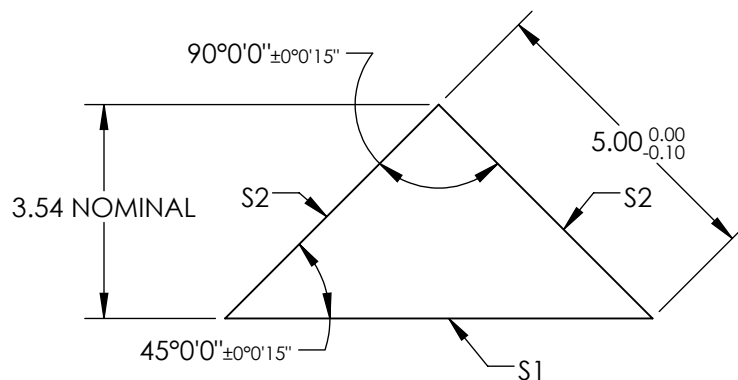

3 FINE GRIND SURFACE

4. ROHS COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | | | | | | | |
|------------------|----------------------|----------------------|---|----|--------|--|-----------------|
| REV. A | S1 | S2 |  Edmund Optics® | | | | |
| SHAPE | PLANO | PLANO | <div>THIRD ANGLE PROJECTION</div>  | | TITLE | 5mm 1/20 WAVE 355nm AR CTD HT RA FS PRISM | |
| SURFACE QUALITY | 20-10 | 20-10 | | | | | |
| CLEAR APERTURE | 6.36 x 4.50 | Ø4.50 | | | | | |
| SURFACE FLATNESS | λ/20 | λ/20 | | | | | |
| BEVEL | PROTECTIVE AS NEEDED | PROTECTIVE AS NEEDED | ALL DIMS IN | mm | DWG NO | 37622 | SHEET 1 OF 1 |