NOTES:


SUBSTRATE:


Alumoscilate Glass Embedded with Silver Ions

2. COATING (APPLY ACROSS COATING APERTURE)

S1 & S2: Uncoated

- 3. EFL: 0.92 4. f/#:0.92
- 5. NUMERICAL APERTURE: 0.55
 6. DESIGN WAVELENGTH: 670nm
 7. WORKING DISTANCE: 0mm
- 8. ROHS: COMPLIANT

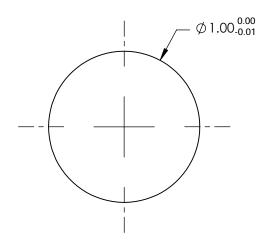

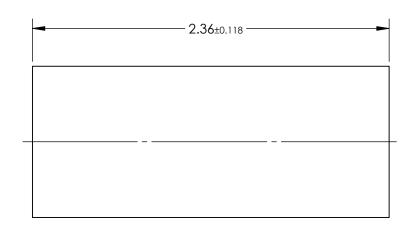

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

BO ®	Edmund	Optics®
-------------	--------	---------

	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	1.0mm Dia, 670nm DWL, 0.0mm WD, Uncoated, GRIN Lens	
SHAPE	PLANO	PLANO					
SURFACE QUALITY	40-20	40-20		·		0.100 0.10 0.11 0.11 0.11	CUEET
CLEAR APERTURE	Ø0.9	Ø0.9	ALL DIMS IN	mm	DWG NO	64517	SHEET 1 OF 1