## NOTES:

SUBSTRATE:

Alumoscilate Glass Embedded with Silver Ions


2. COATING (APPLY ACROSS COATING APERTURE)


S1 & S2: Uncoated

3. EFL: 1.71

5. It.: 1.75
5. NUMERICAL APERTURE: 0.52
6. DESIGN WAVELENGTH: 670nm
7. WORKING DISTANCE: 0.23mm

8. ROHS: COMPLIANT

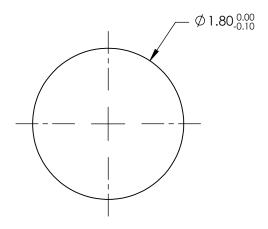

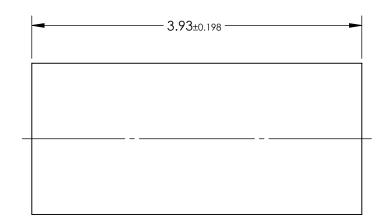

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

<b>GO</b> ®	Edmund	Optics®
-------------	--------	---------

	\$1	\$2	THIRD ANGLE PROJECTION		TITLE	1.8mm Dia, 670nm DWL, 0.23mm WD, Uncoated, GRIN Lens	
SHAPE	PLANO	PLANO					
SURFACE QUALITY	40-20	40-20		I		0.1000.000, 0.1111.120.10	CUEET
CLEAR APERTURE	Ø1.62	Ø1.62	ALL DIMS IN	mm	DWG NO	64520	SHEET 1 OF 1