


## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

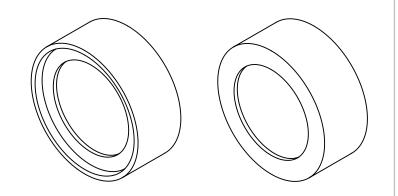



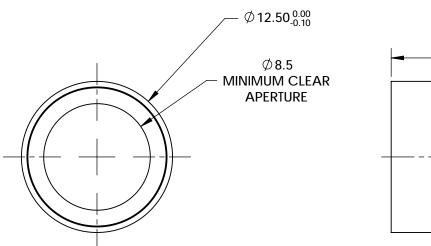

	-	5.00±0.10
-		<u> </u>
		l

R	Δ	N	P	Δ	SS	FI	I٦	ΓFΙ	2

REV. 001	VALUE		
CENTER WAVELENGTH (CWL)	254nm ±2nm		
FULL WIDTH HALF MAX (FWHM)	10.0 ±2nm		
MINIMUM TRANSMISSION	≥50%		
BLOCKING	200 - 650nm		
SURFACE QUALITY	80-50 MOUNTED IN BLACK ANODIZED ALUMINUM RING		
CONSTRUCTION			
COATING TYPE	Hard Coated		
DURABILITY	MIL-C-48497a, SEC 3.4.1		
ENVIRONMENTAL MIL-STD-810F, SEC 507.4			

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	®	Edmund	Optics®
			_

THIRD ANGLE PROJECTION		TITLE	Filter BP 254 x 10nm OD4 12.5mm		
ALL DIMS IN	mm	DWG NO	39305	SHEET 1 OF 1	