


## DO NOT MANUFACTURE PARTS TO THIS DRAWING

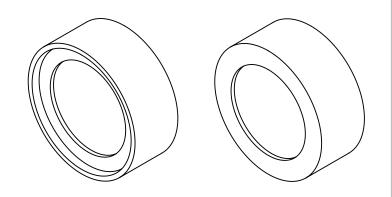

- **5.00**±0.10



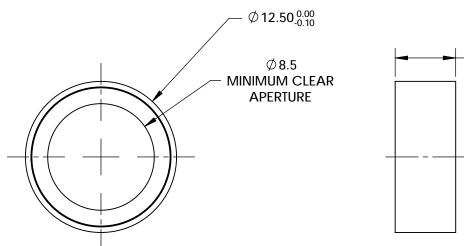

R	ΔΙ	NΙ	$\Box$	D.	Δ	SS	FII	Т	ΕĽ	•
D.	м	v		_	-	. 7. 7	ГΗ		ГГ	

REV. 001	VALUE
CENTER WAVELENGTH (CWL)	266nm ±2nm
FULL WIDTH HALF MAX (FWHM)	10.0 ±2nm
MINIMUM TRANSMISSION	≥50%
BLOCKING	200 - 650nm
SURFACE QUALITY	80-50
CONSTRUCTION	MOUNTED IN BLACK ANODIZED ALUMINUM RING
COATING TYPE	Hard Coated
DURABILITY	MIL-C-48497a, SEC 3.4.1
ENVIRONMENTAL	MIL-STD-810F, SEC 507.4

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE **DIMENSIONS ARE FOR REFERENCE ONLY** 

			Edmund Optic	S®
THIRD ANGLE - PROJECTION	$\phi \lhd$	TITLE	Filter BP 266 x 10nm OD4 12.5mm	
ALL DIMS IN	mm	DWG NO	39306	SHEET 1 OF 1