
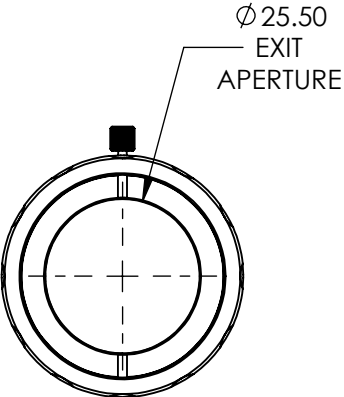
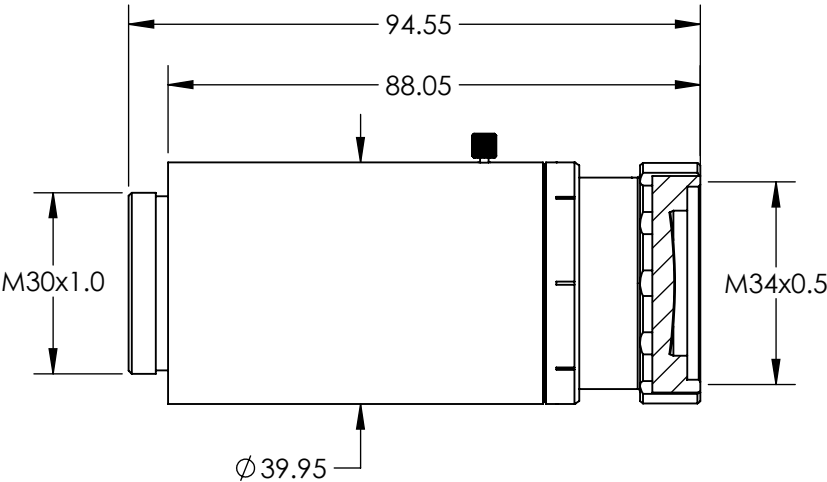


NOTES:

- 1. SUBSTRATE:
FUSED SILICA
- 2. COATING (APPLY ACROSS COATING APERTURE):

LASER UV-VIS (250-532nm)
R(AVG) ≤1.25% @ 250 - 532nm @ 0° AOI

DAMAGE THRESHOLD,
PULSED: 1 J/cm² @ 532nm, 20ns, 20Hz
- 3. TRANSMITTED WAVEFRONT DISTORTION P-V:
λ/10 for 2.6mm input beam (nominal, λ = DWL)
- 4. ROHS COMPLIANT

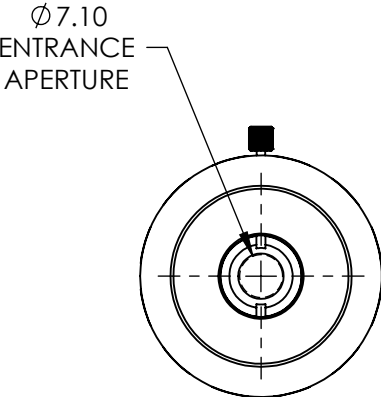

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR
REFERENCE ONLY

EO® Edmund Optics®

THIRD ANGLE PROJECTION		TITLE	7X, UV-VIS Vega™ Broadband Beam Expander	
ALL DIMS IN	mm	DWG NO	39732	SHEET 1 OF 1