
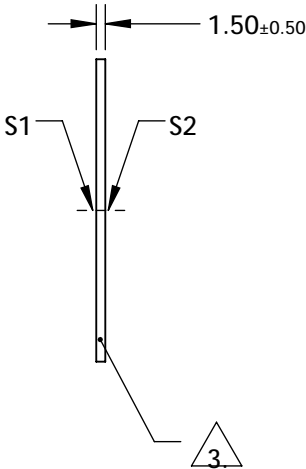

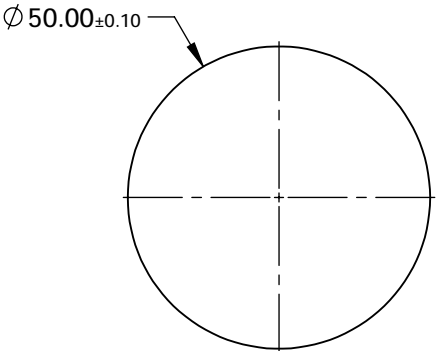


NOTES:


1. SUBSTRATE:
HOYA GLASS: ND-0.3
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN <0.02mm
3. FINE GRIND SURFACE
4. COATING SPECIFICATION:
S1 & S2:R(ABS) ≤1.5% @ 750 - 800nm
R(ABS) ≤1.0% @ 800 - 1550nm
R(AVG) ≤0.7% @ 750 - 1550nm
5. OPTICAL DENSITY: 1.5 +/-0.1 @400-700nm
6. TRANSMISSION (%): 3.2% AVERAGE FROM 400-700nm
7. ROHS COMPLIANT

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

Edmund Optics®

	S1	S2	<div>THIRD ANGLE PROJECTION</div> 		TITLE	1.5 OD, 50mm DIA., NIR II COATED, ABSORPTIVE ND FILTER		
SHAPE	PLANO	PLANO						
SURFACE QUALITY	80-50	80-50	<div>ALL DIMS IN</div> <div>mm</div>		DWG NO	13263		SHEET 1 OF 1
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED						