NOTES:

SUBSTRATE:

N-BK7


- 2. S2 TO BE PARALLEL TO S1 TO WITHIN <1 ARCMIN
- 3. COATING (APPLY ACROSS COATING APERTURE)

S1 & S2: NONE

4.

FINE GRIND SURFACE

5. TRANSMITTED WAVEFRONT DISTORTION: ≤λ/4 (per inch over clear aperture)

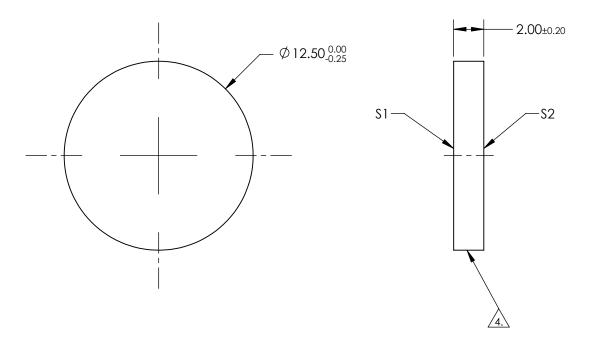

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			_	
	\$1	\$2		
SHAPE	PLANO	PLANO		·
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION	$\oplus \lhd$
CLEAR APERTURE	Ø11.25	Ø11.25		
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm

			Edmund Optics			
	THIRD ANGLE PROJECTION		TITLE	12.5mm Dia., 2mm Thick, Uncoated λ/4 N-BK7 Window		
 D	ALL DIMS IN	mm	DWG NO	20495	SHEET 1 OF 1	