
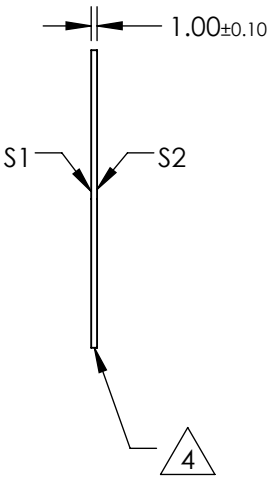
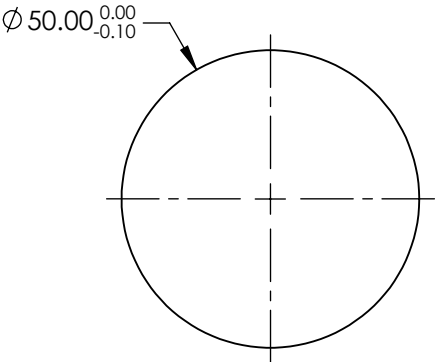


NOTES:



- 1. SUBSTRATE:
VACUUM UV GRADE CaF2
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO < 1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: R(ABS) ≤ 1.5% FROM 750-800nm @ 0° AOI
R(ABS) ≤ 1.0% FROM 800-1550nm @ 0° AOI
R(AVG) ≤ 0.7% FROM 750-1550nm @ 0° AOI

4. FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO		TITLE		
SURFACE FLATNESS	2λ	2λ		50mm Dia., 1mm Thick, NIR II Coated, Calcium Fluoride Window		
SURFACE QUALITY	40-20	40-20		DWG NO		
CLEAR APERTURE	Ø45.00	Ø45.00		22611		
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED		SHEET 1 OF 1		
			ALL DIMS IN	mm		