

## NOTES:

- 1. SUBSTRATE:

  Barium Fluoride (BaF2)
- 2. SURFACE S2 TO BE PARALLEL WITH \$1 TO <3
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1 & \$2: BBAR (2000-5000nm)
- 4. FINE GRIND SURFACE



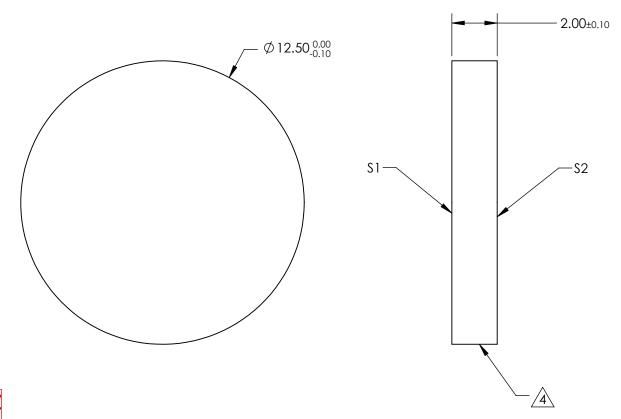

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SHAPE	PLANO	PLANO	
SURFACE QUALITY	60-40	60-40	
CLEAR APERTURE	Ø11.25	Ø11.25	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	

		<b>Edmund Optics</b> ®
THIRD ANGLE	TITLE	12.5mm Dia. x 2mm Thick, BBAR (2000-

THIRD ANGLE PROJECTION	<b>\rightarrow</b>	TITLE	12.5mm Dia. x 2mm Thick, BBAR (2000- 5000nm) Coated Barium Fluoride Window	
ALL DIMS IN	mm	DWG NO	23527	SHEET 21 OF 28