
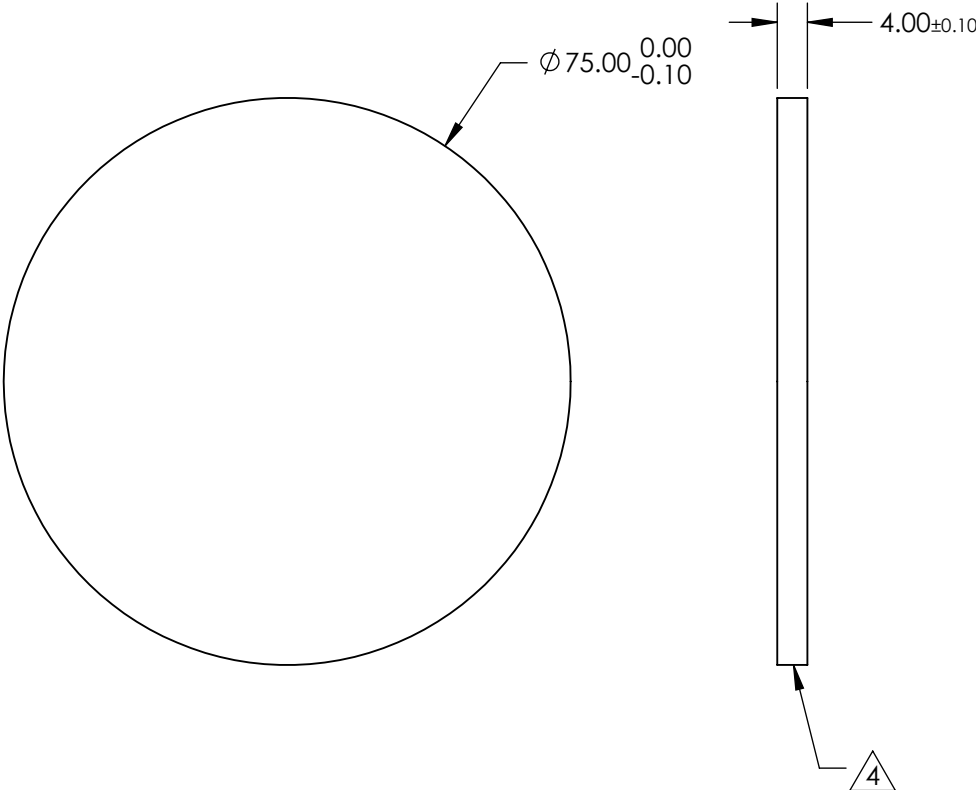


NOTES:



- 1. SUBSTRATE: Fused Silica (Corning 7980)
- 2. S2 TO BE PARALLEL WITH S1 TO WITHIN <1 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE)
  - S1 & S2: R(ABS) ≤1.0% FROM 250 - 425nm
  - R(AVG) ≤0.75% FROM 250 - 425nm
  - R(AVG) ≤0.5% FROM 370 - 420nm
- 4. FINE GRIND SURFACE
- 5. ROHS COMPLIANT



**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	$\phi 67.50$	$\phi 67.50$
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

 Edmund Optics®			
THIRD ANGLE PROJECTION 		TITLE	75mm Dia., 4mm Thick, NIR II Coated, $\lambda/4$ Fused Silica Window
ALL DIMS IN	mm	DWG NO	25646
			SHEET 13 OF 26