




NOTES:

- 1. SUBSTRATE:  
FUSED SILICA
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

S1:Ravg >98% @ 450 - 2000nm  
Ravg >98% @ 2000 - 10,000nm  
S2:NONE

4. FINE GRIND SURFACE

- 5. ROHS COMPLIANT

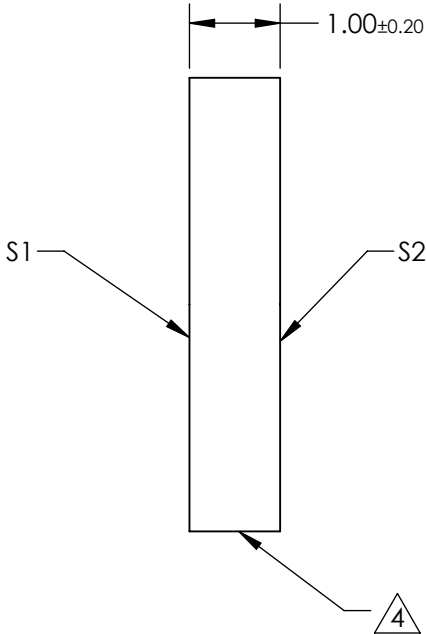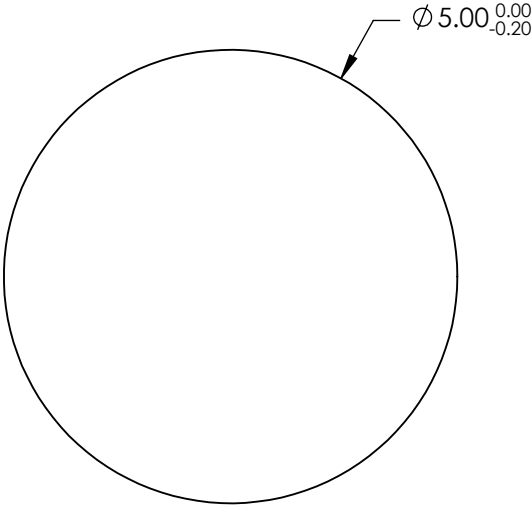

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**Edmund Optics®**

	S1	S2	THIRD ANGLE PROJECTION		TITLE	5mm Diameter, 1mm Thick, Diameter Silver Coated, λ/10 Mirror	
SURFACE QUALITY	20-10	COMMERCIAL POLISH	ALL DIMS IN	mm	DWG NO	26100	SHEET 4 OF 28
SURFACE FLATNESS	λ/10 (Measured Pre-Coating)	N/A					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					