


- NOTES:
- 1. SUBSTRATE:  
FUSED SILICA
  - 2. S2 TO BE PARALLEL WITH S1 TO <1 arcsec
  - 3. COATING (APPLY ACROSS CLEAR APERTURE)  
  
S1&S2: Ravg <2.5% @ 250 - 700nm
  - 4. FINE GRIND SURFACE
  - 5. ROHS COMPLIANT

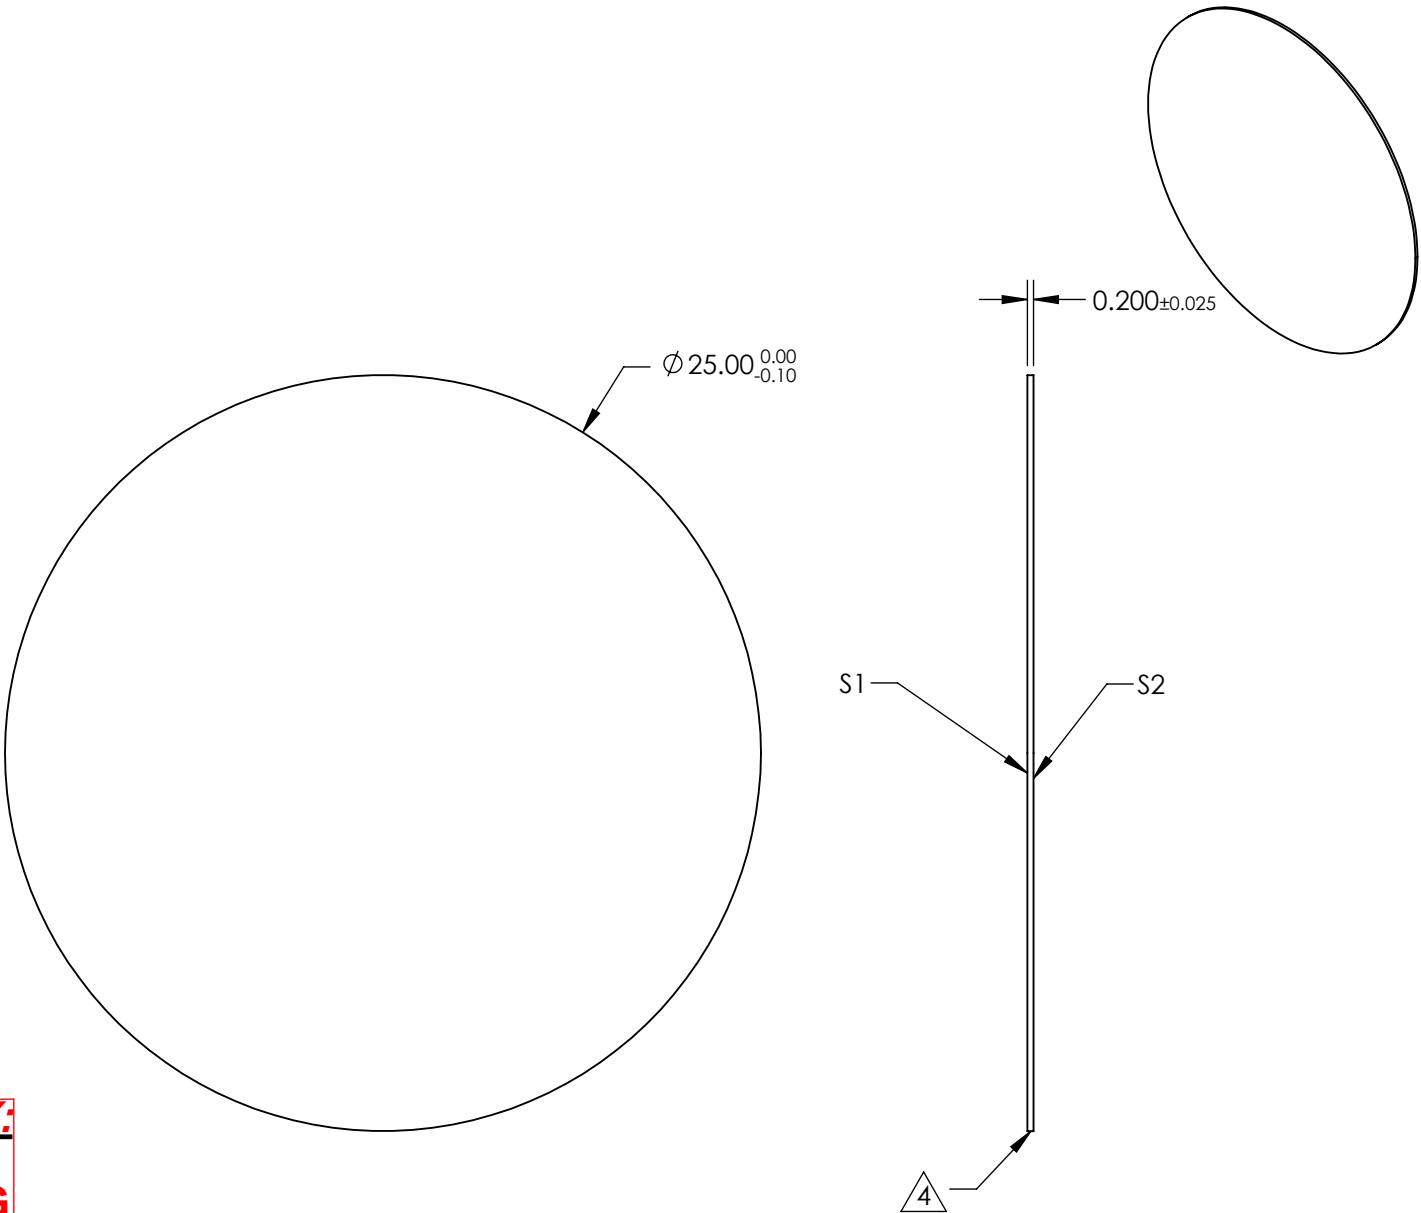


**FOR INFORMATION ONLY:**  
**DO NOT MANUFACTURE**  
**PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60-40	60-40
WAVELENGTH RANGE (nm)	250 - 700	250 - 700
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE  
PROJECTION



ALL DIMS IN

mm



Edmund Optics®

TITLE

25mm Diameter UV-VIS Coated, Ultra-Thin  
Fused Silica Window

DWG NO

24237

SHEET  
10 OF 15