See all 76 Products in Family

LightPath 354560 | 6.33mm Dia., 0.18 NA, BBAR (600-1050nm), Molded Aspheric Lens

See More by Lightpath®

Precision Molded Aspheric Lenses

Stock **#46-372** **20+ In Stock**

- 1 + **£68**.00

ADD TO CART

Volume Pricing	
Qty 1-10	**£68.00** each
Qty 11-49	**£61.20** each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Lightpath Lens Code:
354560

Type:
Aspheric Lens

Typical Applications:
Collimate or Focus Laser Light

Physical & Mechanical Properties

Diameter (mm):
6.33 ±0.015

Clear Aperture CA (mm):
5.10

Edge Thickness ET (mm):
2.280

Center Thickness CT (mm):
2.77 ±0.05

Bevel:
Protective as needed

Optical Properties

Effective Focal Length EFL (mm):
13.86 @ 650nm

Numerical Aperture NA:
0.18

Substrate:
D-ZK3

Focal Length Tolerance (%):
±1

Aspheric Design Wavelength (nm):
650

Coating:
BBAR (600-1050nm)

Coating Specification:
R_{avg} <1.0% @ 600 - 1050nm

Surface Quality:
40-20

f/#:
2.78

Wavelength Range (nm):
600 - 1050

Working Distance (mm):
12.11

Conjugate Distance:
Infinite

Transmitted Wavefront Error (λ, RMS):
< 0.07

Environmental & Durability Factors

Operating Temperature (°C):
≤200

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 247:
Compliant

Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.

Technical Information

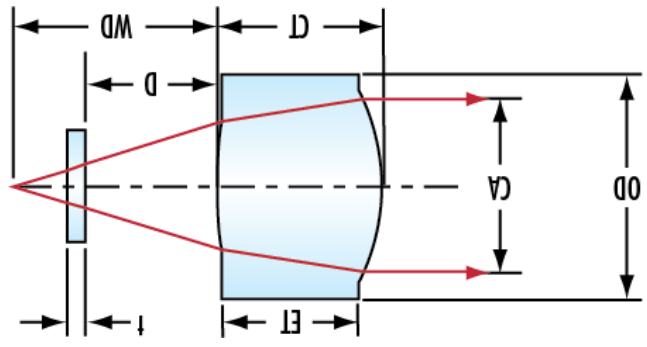
WD
CT
D
CA
OD
ET
t