See all 76 Products in Family

LightPath 354220 | 7.2mm Dia., 0.25 NA, BBAR (600-1050nm), Molded Aspheric Lens

See More by Lightpath®

Precision Molded Aspheric Lenses

Stock **#87-118** CLEARANCE **20+ In Stock**

Other Coating Options

- 1 + **£31.20**

ADD TO CART

Volume Pricing	
Qty 1+	**£31.20** each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Compatible Window:

Thickness: 0.25 (t) (mm)
Material: BK7

Lightpath Lens Code:

354220

Type:

Aspheric Lens

Typical Applications:
Collimate or Focus Laser Light

Physical & Mechanical Properties

Diameter (mm):
7.20 ±0.020

Clear Aperture CA (mm):
5.5

Edge Thickness ET (mm):
4.21

Center Thickness CT (mm):
5.03 ±0.05

Bevel:
Protective as needed

Distance from Window to Lens (D) (mm):
6.909

Optical Properties

Effective Focal Length EFL (mm):
11.00 @ 633nm

Numerical Aperture NA:
0.25

Substrate:
D-ZK3

Focal Length Tolerance (%):
±1

Aspheric Design Wavelength (nm):
633

Coating:
BBAR (600-1050nm)

Coating Specification:
R_{abs} <1.0% @ 600 - 1050nm

Surface Quality:
40-20

f/#:
2.00

Wavelength Range (nm):
600 - 1050

Working Distance (mm):
7.9

Conjugate Distance:
Infinite

Transmitted Wavefront Error (λ, RMS):
< 0.040

Environmental & Durability Factors

Operating Temperature (°C):
≤200

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 233:
Compliant

Product Details

- Eliminate Spherical Aberration
- Multiple Coating Options Available
- Range of Numerical Apertures

LightPath® Geltech™ Molded Aspheric Lenses are used to eliminate spherical aberration and improve focusing and collimating accuracy in a variety of laser applications. Low NA aspheric lenses are designed to maintain beam shape, while high NA lenses gather all available light to maintain beam power over long distances. LightPath® Geltech™ Molded Aspheric Lenses are ideal for applications including sighting systems, bar code scanners, laser diode-to-fiber coupling, optical data storage, or biomedical lasers.

Technical Information

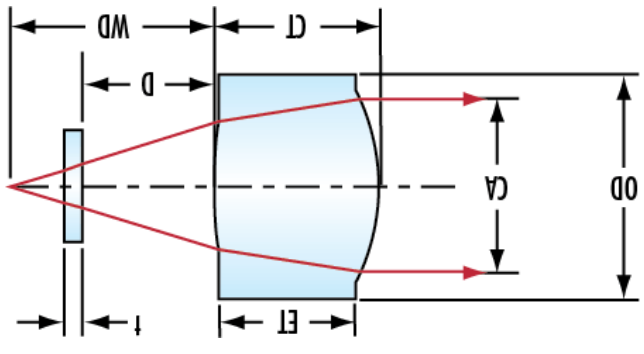
WD
CT
D
CA
OD
t
ET