


[See all 4 Products in Family](#)

25.4mm Dia. x 100mm FL, 3-5µm BBAR Coated, ISP Optics Silicon (Si) PCX Lens | HDAR35-SI-PX-25-100

See More by [ISP Optics](#)

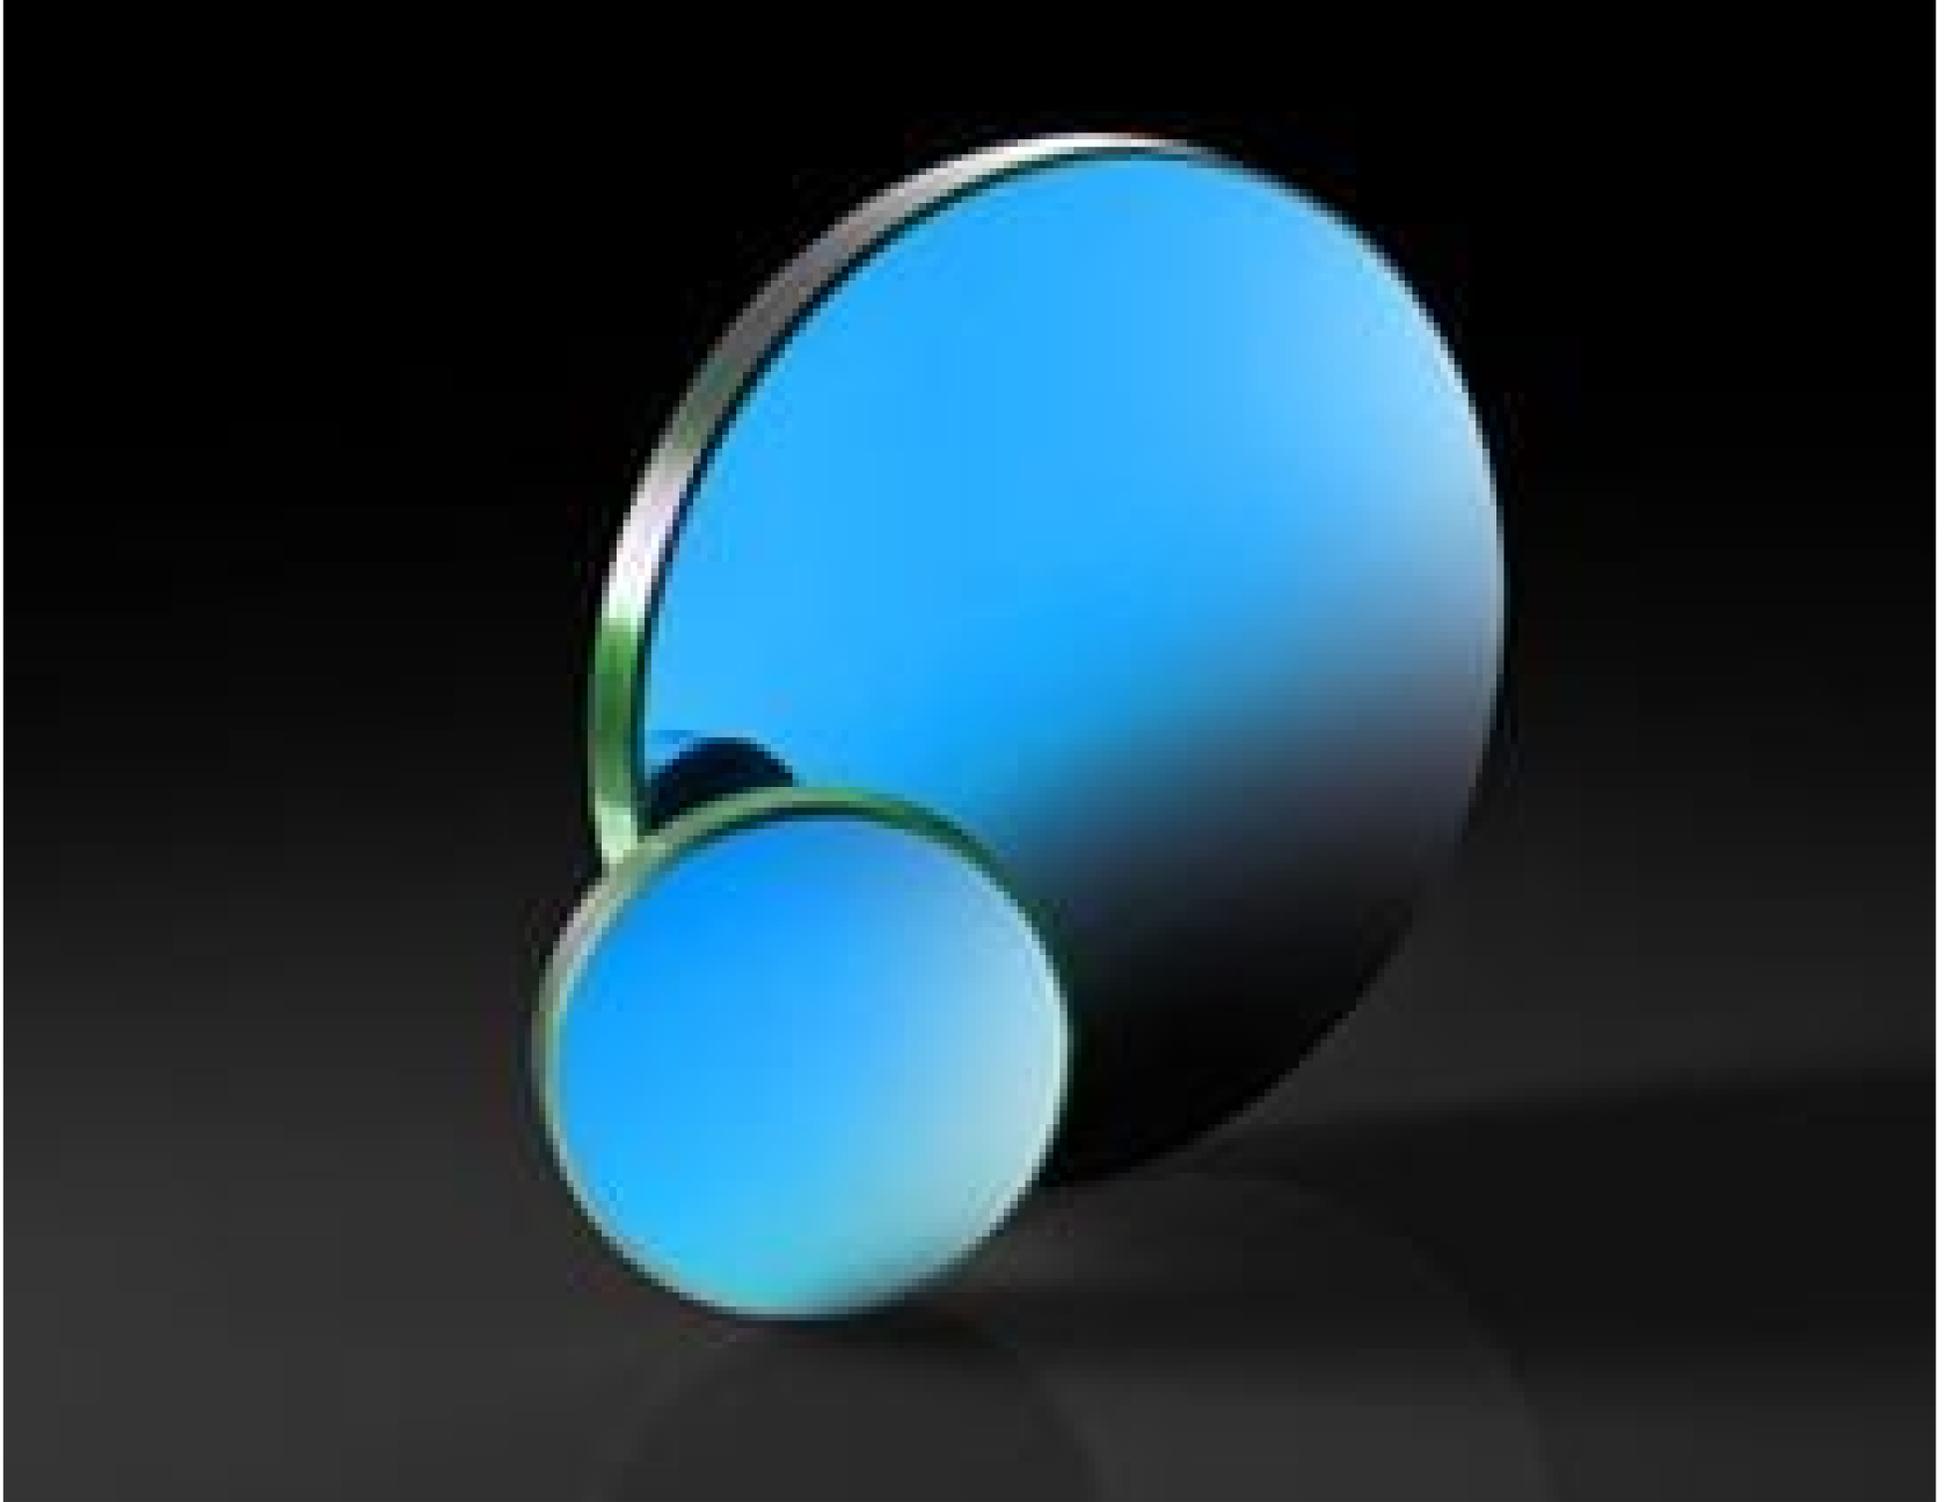

Stock #24-894 CLEARANCE **1 In Stock**

⊖ 1 ⊕ £196⁸⁰

ADD TO CART

Volume Pricing	
Qty 1+	£196.80 each
Need More?	Request Quote

! Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Plano-Convex Lens **Type:**

HDAR35-SI-PX-25-100 **Model Number:**

Physical & Mechanical Properties

Diameter (mm):

25.40 +0.00/-0.13

Centering (arcmin):
<3

Center Thickness CT (mm):
2.30 ±0.20

Edge Thickness ET (mm):
2.00

Clear Aperture CA (mm):
22.86

Bevel:
Protective as needed

Optical Properties

Effective Focal Length EFL (mm):
100.00 @4μm

Coating:
BBAR (3000-5000nm)

Coating Specification:
R_{avg} <0.5% @3 - 5μm R_{abs} <1.5% @3 - 5μm

Substrate:
Silicon (Si)

Surface Quality:
80-50

Irregularity (P-V) @ 632.8nm:
1λ

Focal Length Tolerance (%):
±2

Radius R₁ (mm):
242.42

f#:
3.94

Numerical Aperture NA:
0.13

Wavelength Range (nm):
3000 - 5000

Regulatory Compliance

RoHS 2015:
Compliant

Certificate of Conformance:
View

Reach 240:
Compliant

Product Details

- High-Durability Anti-Reflection (HDAR) Coated for 3 - 5μm
- Ideal for Weight Sensitive Applications
- Available Focal Lengths from 25.4 – 500mm

ISP Optics Silicon (Si) Plano-Convex (PCX) Lenses feature a High Durability Anti-Reflection (HDAR) coating for increased transmission in the 3 - 5μm range. Silicon features a Knoop Hardness of 1150 making it harder and less brittle than Germanium. In addition, the HDAR coating increases the durability of the substrate, enabling use in harsh environments. ISP Optics Silicon (Si) Plano-Convex (PCX) Lenses also feature a low density of 2.329g/cm³, making them ideal for weight-sensitive IR applications such as Near-Infrared (NIR) imaging and infrared spectroscopy.