


## 600 Grooves/mm, 17.5° Groove Angle, 12.7mm Sq, DUV Transmission Grating

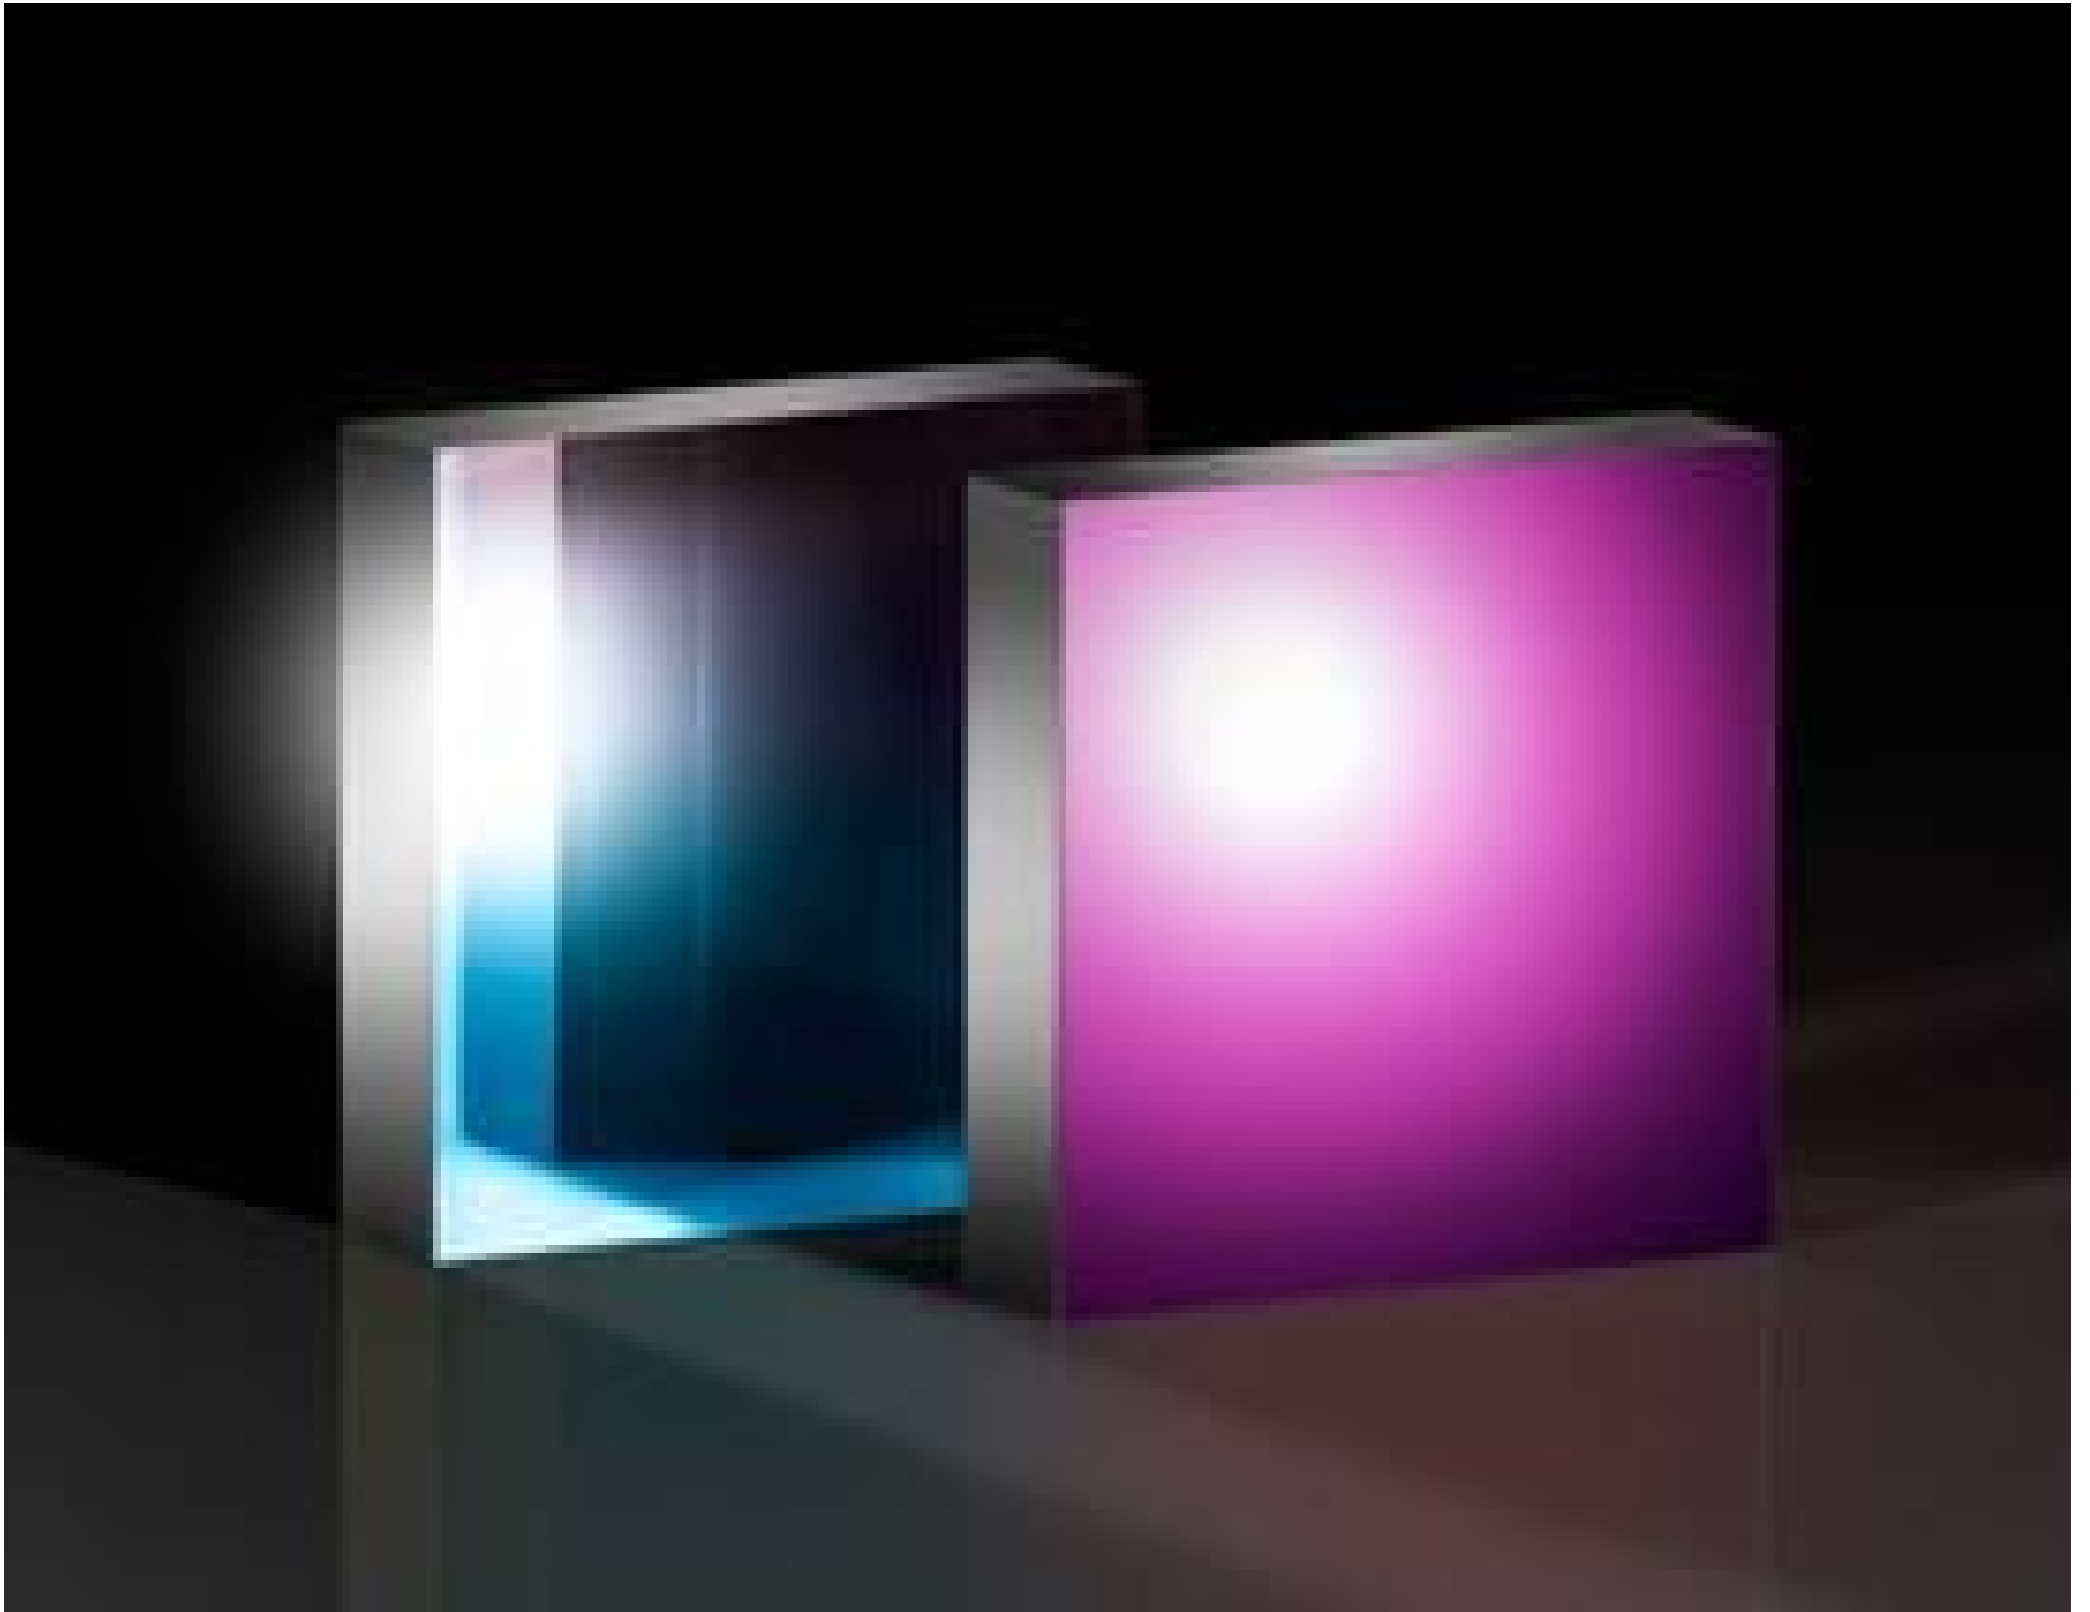

DUV Transmission Gratings

Stock #73-796 **NEW** 2 In Stock

⊖ 1 ⊕ £524<sup>00</sup>

**ADD TO CART**

Volume Pricing	
Qty 1-9	£524.00 each
Qty 10-24	£471.60 each
Need More?	<a href="#">Request Quote</a>

ⓘ Prices shown are exclusive of VAT/local taxes

Product Downloads

### SPECIFICATIONS

#### General

Transmission Diffraction Grating **Type:**

#### Physical & Mechanical Properties

12.70 x 12.70	<b>Dimensions (mm):</b>
90	<b>Clear Aperture (%):</b>
Ruled Grating	<b>Construction:</b>
2.00	<b>Thickness (mm):</b>

## Optical Properties

600	<b>Groove Density (grooves/mm):</b>
190 - 400	<b>Wavelength Range (nm):</b>
17.5	<b>Blaze Angle (°):</b>

## Regulatory Compliance

<a href="#">Compliant</a>	<b>RoHS 2015:</b>
<a href="#">View</a>	<b>Certificate of Conformance:</b>
<a href="#">Compliant</a>	<b>Reach 247:</b>


## PRODUCT DETAILS

- Designed for Deep Ultraviolet (DUV) Wavelengths between 190 - 400nm
- High Performance in Harsh Environments
- Multiple Diffraction Angles Available in 12.7 or 25mm Square Sizes
- 2025 SPIE Prism Award Winning Product

Omega Optical DUV Transmission Gratings are designed to extend into the deep UV range, covering 190 - 400nm. Featuring good environmental stability and resistance to solarization, these gratings offer high performance and durability for systems operating in harsh environments. These Gratings provide a diffraction efficiency of 20% for wavelengths greater than 190nm and up to 50% for wavelengths between 200 - 240nm. Omega Optical DUV Transmission Gratings are available in 12.7 and 25mm square construction with resolution ranges from 300 - 1200 grooves/mm. These gratings are ideal for applications that require high-performance solutions, such as semiconductor manufacturing and life science analysis.

**Handling Gratings:** Gratings require special handling and are prone to damage from fingerprints and aerosols. Gratings should only be handled by the edges.

## TECHNICAL INFORMATION

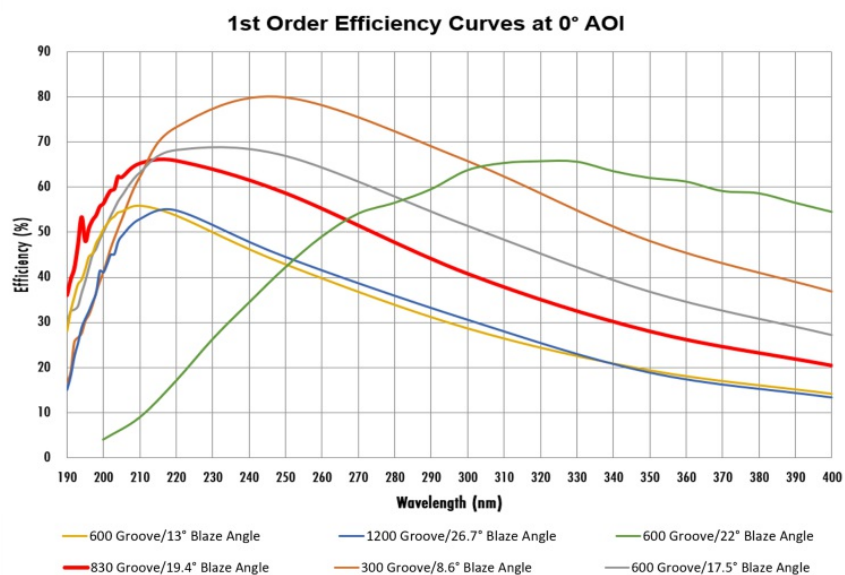

## SPECIAL HANDLING

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools