





Alvium 1800 U-501 NIRm

- AR0522 CMOS sensor
- ALVIUM image processing
- USB3 Vision
- Mono and color models

Hardware option: Closed Housing S-Mount Standard

Alvium 1800 U – Your entry into high-performance imaging

Industrial USB cameras with attractive price-performance ratio

Alvium 1800 U-501 NIR with ON Semi AR0522 runs 68.0 frames per second at 5.0 MP resolution.

Alvium 1800 U is your entry into high-performance imaging with ALVIUM® Technology for industrial applications. Equipped with the newest generation of sensors, these small and lightweight cameras deliver high image quality and frame rates at the best price-performance ratio. With its USB3 Vision compliant interface and industrial-grade hardware, it is your workhorse for different machine vision applications whether it is on a PC-based or an embedded system.

Easy software integration with Allied Vision's Vimba Suite and compatibility to the most popular third party image-processing libraries.

See the Alvium Cameras Hardware Options for lens mount and housing options, as well as the Customization and OEM Solutions webpage for additional options.

Specifications

| Alvium 1800 U-501 NIRm Closed Housing S-Mount Standard | | |
|--|--|---------------------|
| Product code | | 14615 |
| Interface | | USB3 Vision |
| Resolution | | 2592 (H) × 1944 (V) |



| Alvium 1800 U-501 NIRm Closed Housing S-Mount Standard | | | |
|--|--|--|--|
| Spectral range | 300 to 1100 nm | | |
| Sensor | ON Semi AR0522 | | |
| Sensor type | CMOS | | |
| Shutter mode | Rolling shutter | | |
| Sensor size | Type 1/2.5 | | |
| Pixel size | $2.2 \mu m \times 2.2 \mu m$ | | |
| Lens mount | S-Mount | | |
| Max. frame rate at full resolution | 68 fps at ≥ 375 MByte/s, Mono8 | | |
| ADC | 10 Bit | | |
| Image buffer (RAM) | 256 KB | | |
| Non-volatile memory (Flash) | 1024 KB | | |
| Imaging performance Imaging performance data is based on the evaluation methods in the EMVA 1288 Release 3.1 standard for characterization of image sensors and cameras. Measurements are typical values for NIR models measured without optical filter. | | | |
| Quantum efficiency at 529 nm | 84 % | | |
| Quantum efficiency at 850 nm | 30 % | | |
| Temporal dark noise | 6.9 e ⁻ | | |
| Saturation capacity | 10600 e ⁻ | | |
| Dynamic range | 62 dB | | |
| Absolute sensitivity threshold | 8 e ⁻ | | |
| Output | | | |
| Bit depth | Max. 10 Bit | | |
| Monochrome pixel formats | Mono8, Mono10, Mono10p | | |
| General purpose inputs/outputs (GPIOs) | | | |
| TTL I/Os | 4 programmable GPIOs | | |
| Operating conditions/dimensions | | | |
| Operating temperature | +5 °C to +65 °C (housing) | | |
| Power requirements (DC) | Power over USB 3.1 Gen 1 External power 5.0 V | | |
| Power consumption | USB power: 2.2 W (typical) Ext. power: 2.4 W (typical) | | |
| Mass | 60 g | | |



Alvium 1800 U-501 NIRm Closed Housing S-Mount Standard

Body dimensions (L \times W \times H in mm) 33 \times 29 \times 29


2014/30/EU; 2011/65/EU, incl. amendment 2015/863/EU

(RoHS); FCC Class B digital device; CAN ICES-003 (B) /

NMB-3 (B)

Quantum efficiency

Regulations

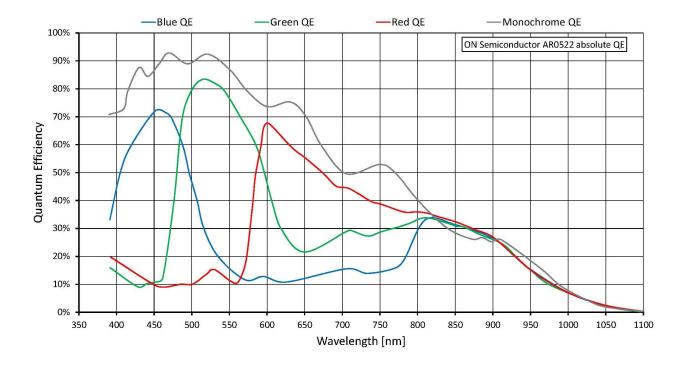

Features

Image control

Auto control

- Auto exposure
- Auto gain
- Auto white balance (color models)
- Auto features regions control
- Auto features algorithms control



Other image controls

- Binning
- Black level
- Contrast
- De-Bayering up to 5×5 (color models)
- Exposure time
- Gain
- Gamma
- Hue (color models)
- Saturation (color models)
- DPC (factory calibrated)
- FPNC (factory calibrated)
- Region of interest (ROI)
- Reverse X/Y

Camera control

- Acquisition frame rate
- I/O and trigger control
- Temperature monitoring (sensor board)
- Status LED luminance control
- Firmware update in the field
- U3 Power Saving Mode

Technical drawing



Camera hardware options

The Alvium Cameras Hardware Options document informs about submodels, such as bare board or open housing cameras with different lens mounts.



