


[See all 6 Products in Family](#)

Film-Format Achromatic Polymer Retarder $\lambda/4$ 25.4mm Dia AR

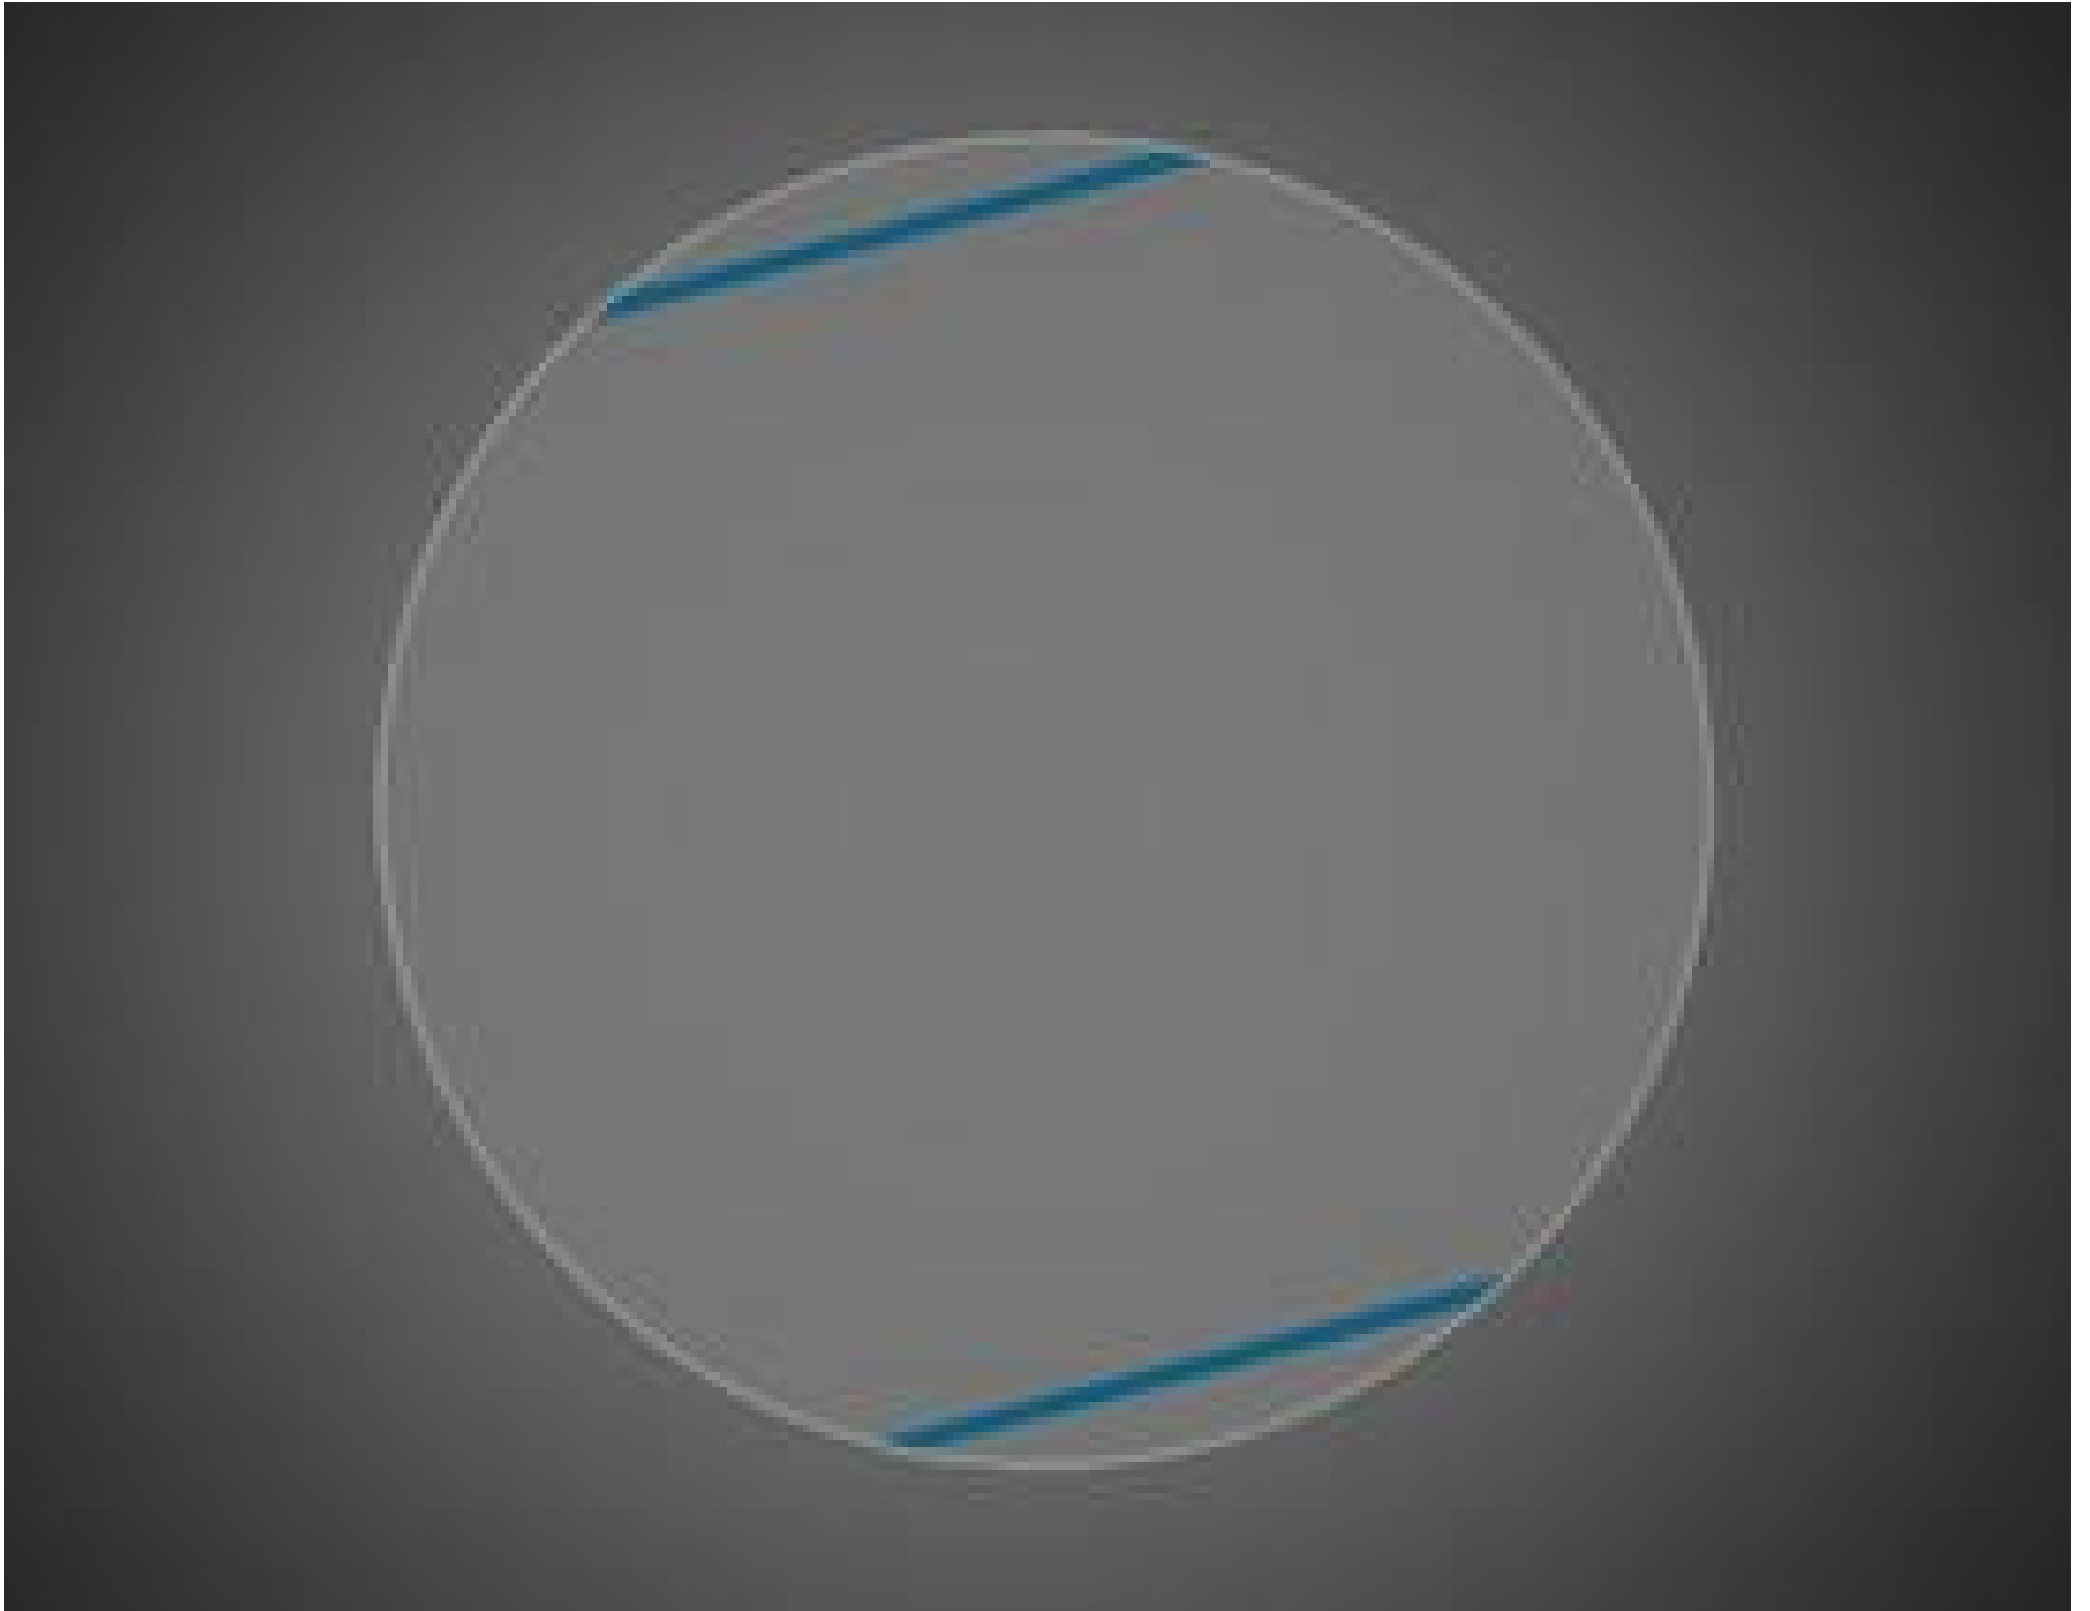

Stock **#70-574** [CONTACT US](#)

- 1 + £588.⁰⁰

ADD TO CART

Volume Pricing	
Qty 1-10	£588.00 each
Qty 11-25	£444.00 each
Qty 26+	£412.00 each
Need More?	Request Quote

! Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Note:
Slow axis marked with blue dot on part and stripe on protective film

Physical & Mechanical Properties

Diameter (mm):
25.40 +/- 0.15

Thickness (mm):

0.55 Nominal

Optical Properties

±10 **Angle of Incidence (°):**

Polymer Stack **Substrate:** □

λ/4 ± λ/100 **Retardance:**

60-40 **Surface Quality:**

BBAR: R<= 0.75% @ 700-1100nm (per surface) **Coating Specification:**

700 - 1100 **Wavelength Range (nm):**

500 Watt/cm² CW, 3 J/cm² 10 nsec pulses @ 532nm, 2 J/cm² 20 nsec pulses @ 1064nm typical **Damage Threshold, By Design:** □

Anti-Reflection (both sides) **Coating Type:**

Environmental & Durability Factors

-20 to +40 **Operating Temperature (°C):**

Regulatory Compliance

[Compliant](#) **RoHS 2015:**

[View](#) **Certificate of Conformance:**

[Compliant](#) **Reach 250:**

Product Details

- Ultra-Thin ≤0.55mm Substrates for OEM Integration
- Options For 700-1100nm and 700-1550nm
- Wide Acceptance Angle Tolerance of ±10°

Ultra-Thin NIR Achromatic Polymer Retarders feature an optically fused and adhesive-free construction, allowing for high temperature resistance, high transmission, and an ultra-thin format. These retarders are designed with a multi-layer polymer stack and feature a 0.35mm thickness for λ/2 retarders and 0.55mm thickness for λ/4 retarders. Available either uncoated or with an AR-Coating, these retarders offer a retardance tolerance of λ/100 in the NIR range at a wide range of angles of incidence. Uncoated Ultra-Thin NIR Achromatic Polymer Retarders offer an increased retardance range of 700-1550nm while the coated options feature improved transmission from 700-1100nm. These waveplates are ideal for NIR imaging and analytical instrumentation, as well as OEM integration and other applications requiring a small form factor.