

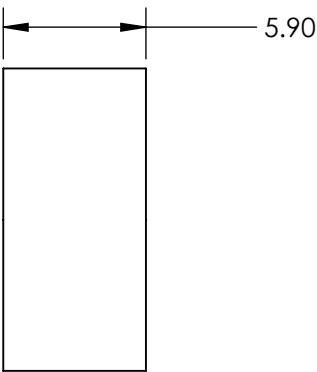



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

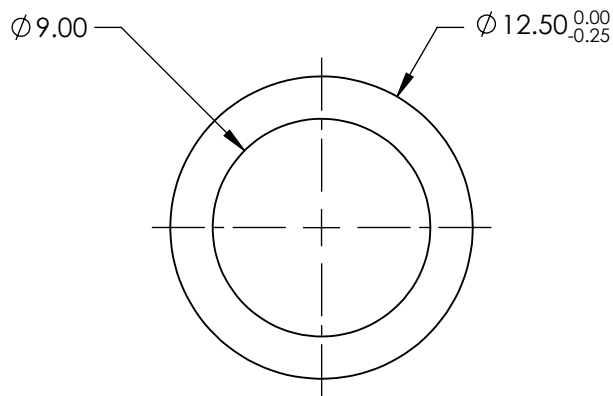

| | VALUE |
|----------------------------|--------------------------------|
| OPTICAL DENSITY | ≥4.0 |
| CENTER WAVELENGTH (CWL) | 560 +3.0/-1.0 nm |
| FULL WIDTH HALF MAX (FWHM) | 10 ±2 nm |
| MINIMUM TRANSMISSION | >55 % |
| BLOCKING | 200 - Far IR |
| SURFACE QUALITY | 80-50 |
| CONSTRUCTION | MOUNTED IN BLACK ANODIZED RING |
| COATING TYPE | TRADITIONAL COATED |

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

 **Edmund Optics®**

| | | | | |
|--|----|--------|---|-----------------|
| THIRD ANGLE PROJECTION  | | TITLE | Ø12.5mm, 560nm x 10nm, MOUNTED BANDPASS FILTER | |
| ALL DIMS IN | mm | DWG NO | 67766 | SHEET 1 OF 1 |