80 µm Aperture Diameter, 1" OD Mounted, Precision Pinhole

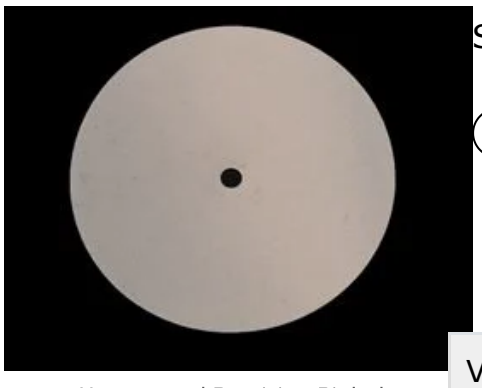

Unmounted Precision Pinhole

+21

Stock #90-300 NEW 2 In Stock

- 1 +

£71.20

ADD TO CART

Volume Pricing	
Qty 1-5	£71.20 each
Qty 6+	£63.44 each
Need More?	Request Quote

Prices shown are exclusive of VAT/local taxes

General

Type:	Mounted

Physical & Mechanical Properties

Outer Diameter (mm):	25.4 +0.000/-0.05	**Construction:**	Stainless Steel
Fixed Aperture Diameter (µm):	80	**Thickness (mm):**	0.03 Nominal
Aperture Tolerance (µm):	±5	**Aperture Centration (µm):**	±125

Threading & Mounting

Mount Thickness (mm):	2.54

Regulatory Compliance

RoHS 2015:	Compliant	**Certificate of Conformance:**	View
Reach 247:	Compliant		

Product Details

- Available in Aperture Mounts for a Secure Mechanical Support
- Pinhole Sized Ranging from 1 to 1,000 Microns
- **High Power Apertures** Available

Unmounted Precision Pinholes

Precision Pinholes are high quality apertures centered to ±0.002" (50 microns). They are constructed of stainless steel and are 3/8" (9.5mm) in diameter. Smaller diameter pinholes will reduce energy throughput, while larger diameter pinholes will pass more spatial noise. Precision pinholes have sizes ranging from 1 to 1,000 microns. Typical applications include leak detection, aerosol studies, holography, fiber optics guides, spatial filtering, research, and more.

Use the **Precision Pinhole Mount** to integrate unmounted pinholes into a variety of mechanical components easily.

Mounted Precision Pinholes

Precision Pinholes are available in aperture mounts for secure mechanical support. The mounts also fit into various optical assemblies. Each 9.5mm diameter pinhole is sealed within a 25mm diameter black-anodized aluminum mount. The mount is clearly labeled with a pinhole aperture diameter for easy identification.

Note: Aperture Centering to Mount ±125 microns.
Edmund Optics offers a wide selection of precision pinholes for leak detection, aerosol studies, holography, fiber optic guides, spatial filtering, research, and more. These pinholes are available in a range of diameters and are ideal for controlling light propagation. Each pinhole is manufactured using high-accuracy techniques, providing consistent circular aperture geometry and high edge quality. Available in both mounted and unmounted formats, these pinholes support a variety of optical setups, from experimental labs to industrial environments.

Technical Information

Related Products

Precision Pinhole Mount

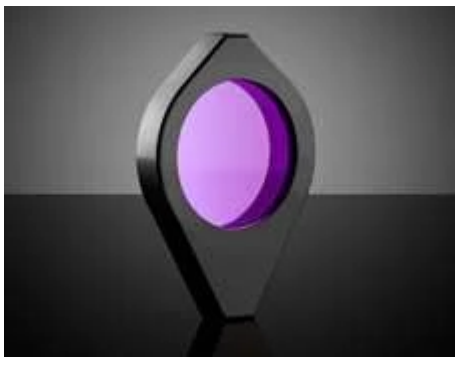

Compact Mirror & Lens Mounts

Frequently Purchased Together

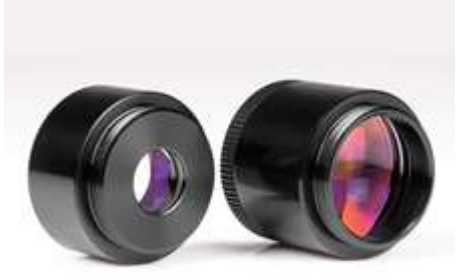

#52-292 – 25/25.4mm Diameter, T-Mount Thin Optic Mount
£57.60
Qty

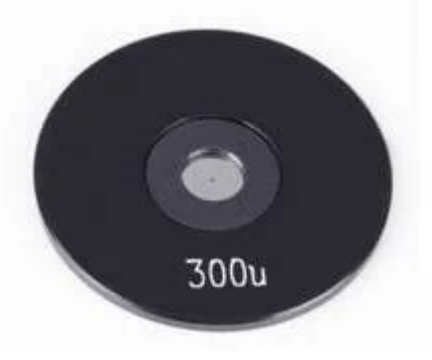

#90-301 – 100 µm Aperture Diameter, 1" OD Mounted, Precision Pinhole
£71.20
Qty

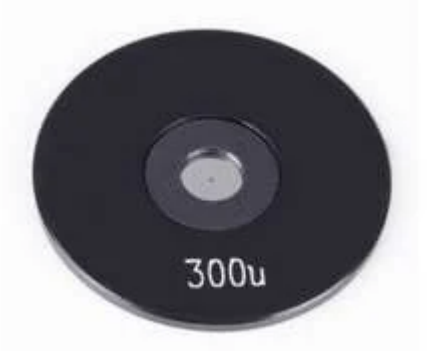

#90-302 – 150 µm Aperture Diameter, 1" OD Mounted, Precision Pinhole
£71.20
Qty

Resources

Media Type

- FAQ
- Glossary
- Application Note
- Trending in Optics
- Video

? FAQ
What do spatial filters do and how do I use them?

GLOSSARY
Spatial Filter

APPLICATION NOTE
Understanding Spatial Filters

? FAQ

Do you have any components that would...

? FAQ

Do your iris diaphragms have mounts for...

GLOSSARY

Axial Runout

View More